


SOT-23

PNP

, h_{FE}







		μ				
		μ				
						μ
						μ
						μ

*


≤300μS

≤ μ



≤2.0%

≤


Static Characteristics

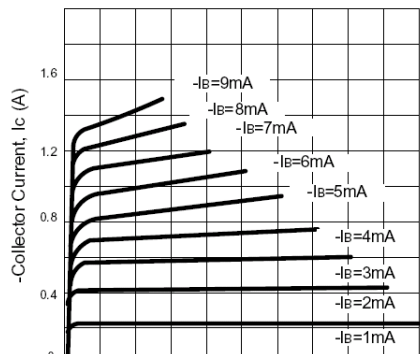



Derating Curve of Safe Operating Areas

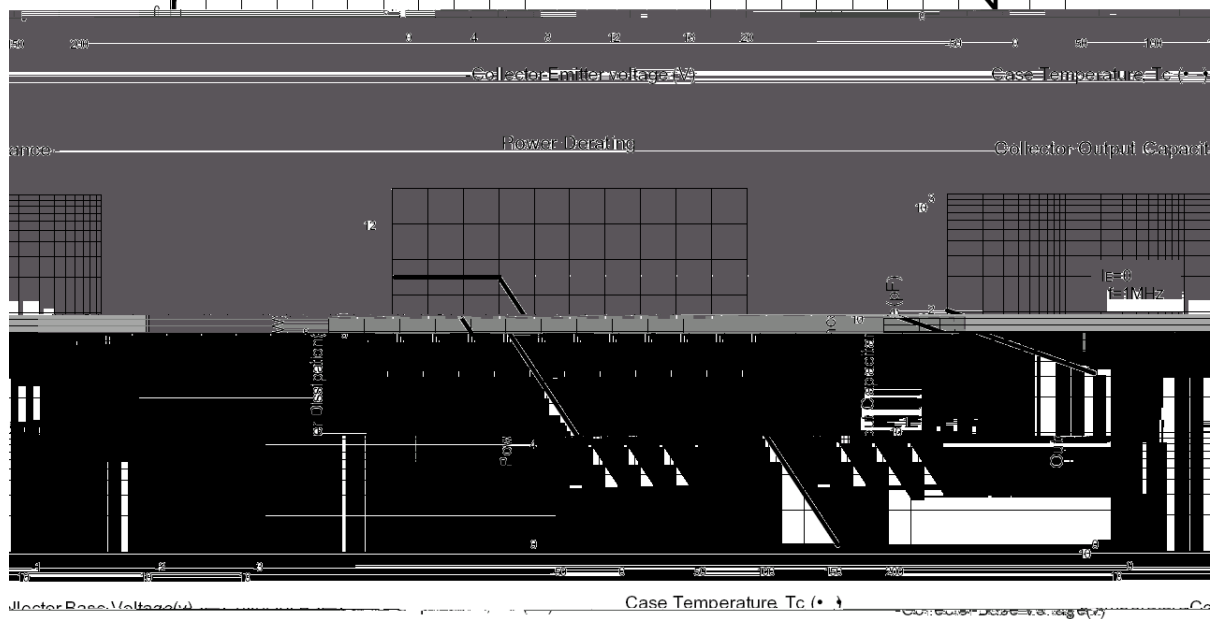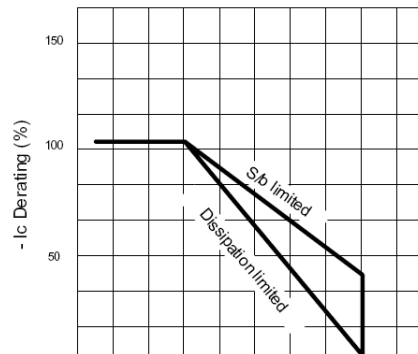

Current Gain-Bandwidth Product

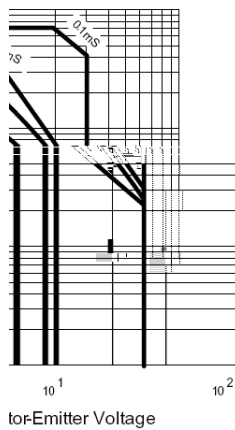



Safe Operating Area

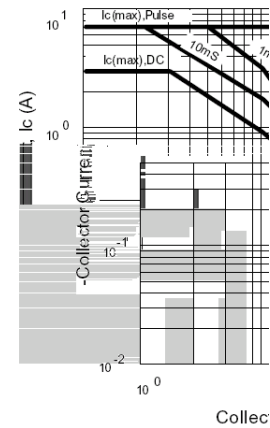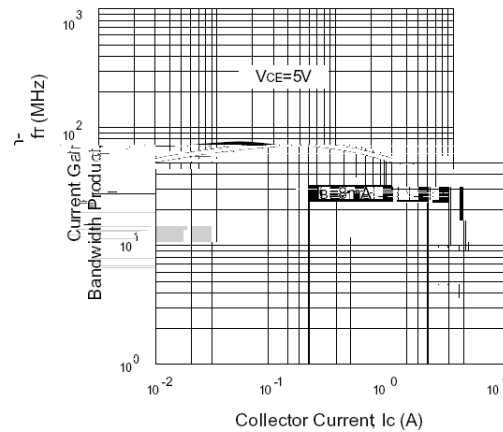


SOT-23

单位: mm

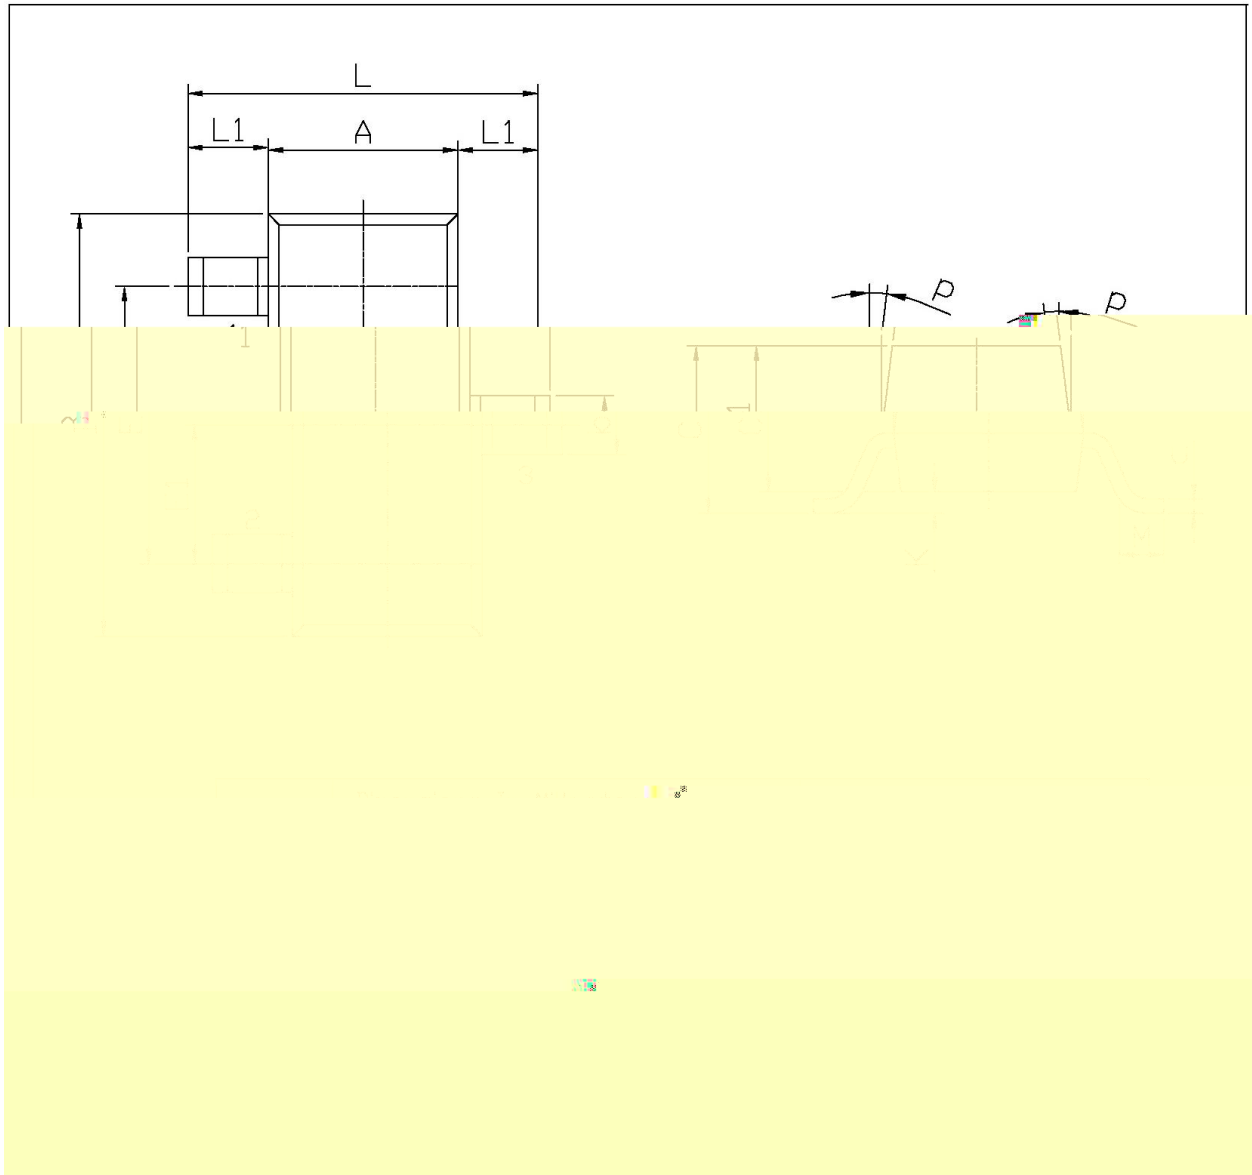

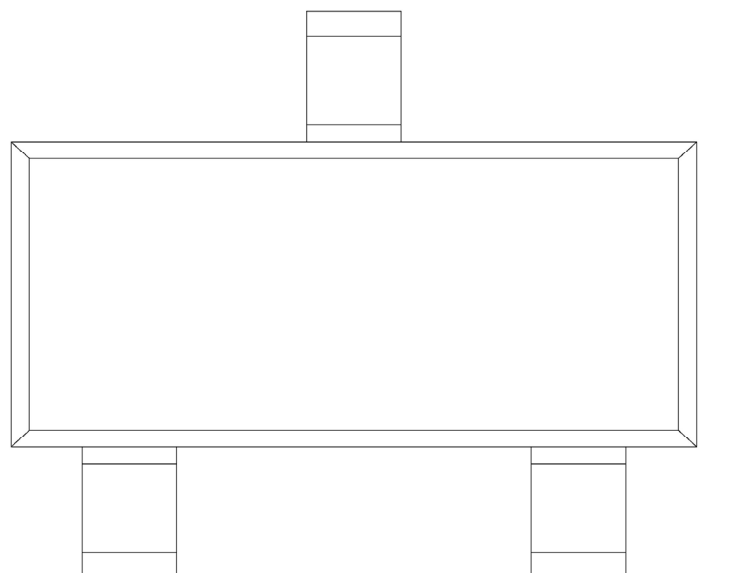

H
72
Q

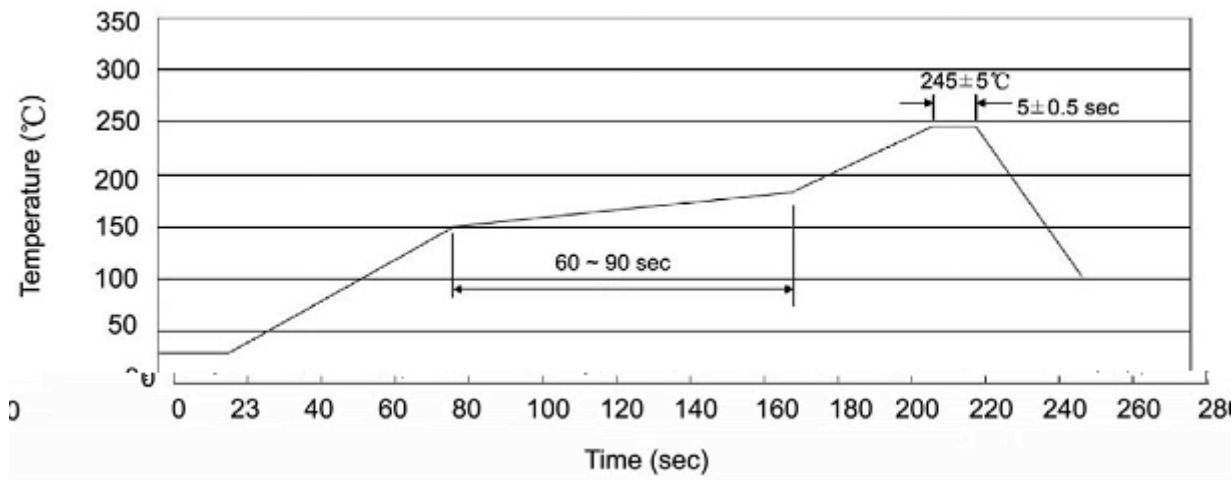

± ± ± ±

± ± ± ±

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205