

/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve



/ Package Dimensions


SOT-23

单位：mm

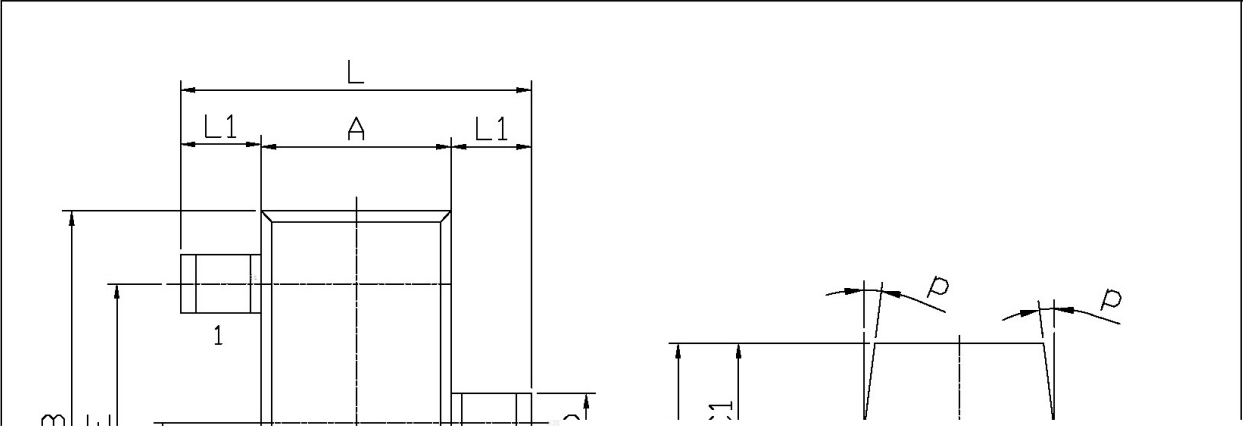

	MIN	MAX		MIN	MAX
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	W	0.95	0.95
R	0.70	0.90	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	Q	7°	
b	0.35	0.55			


/ Marking Instructions

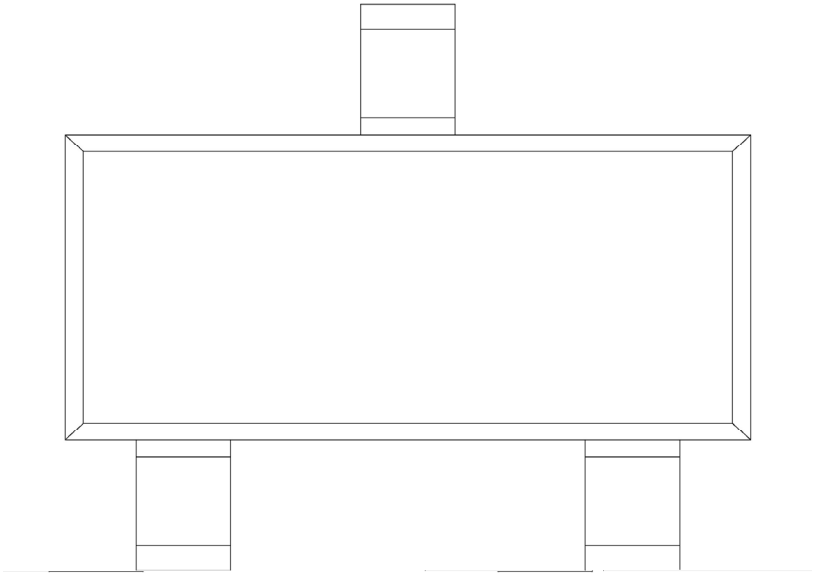

H
B
Q

H
B
Q

() /

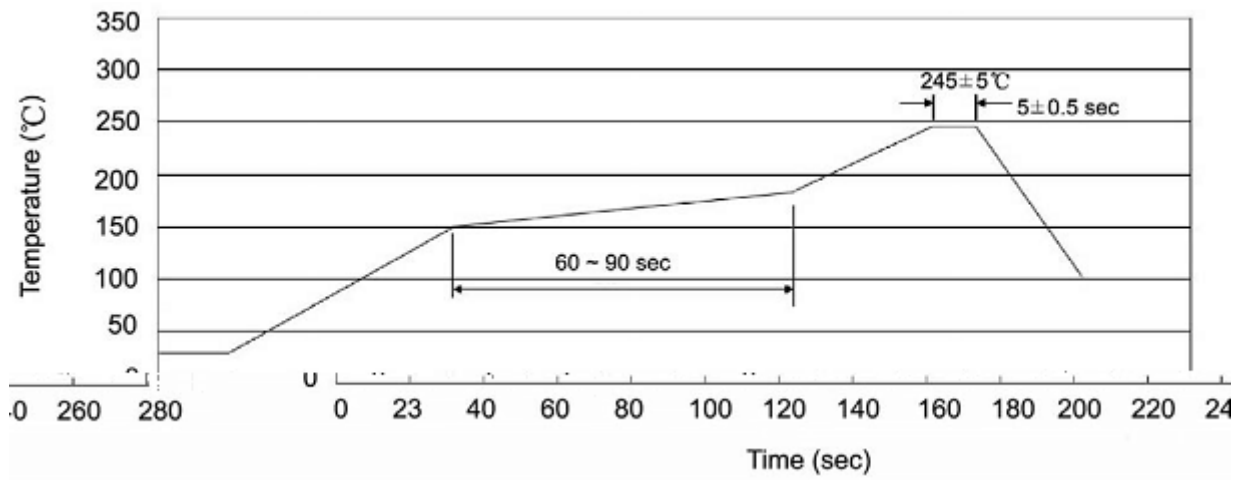

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

/ Notices