


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	~	~	~


/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)

		μ				
		∞				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

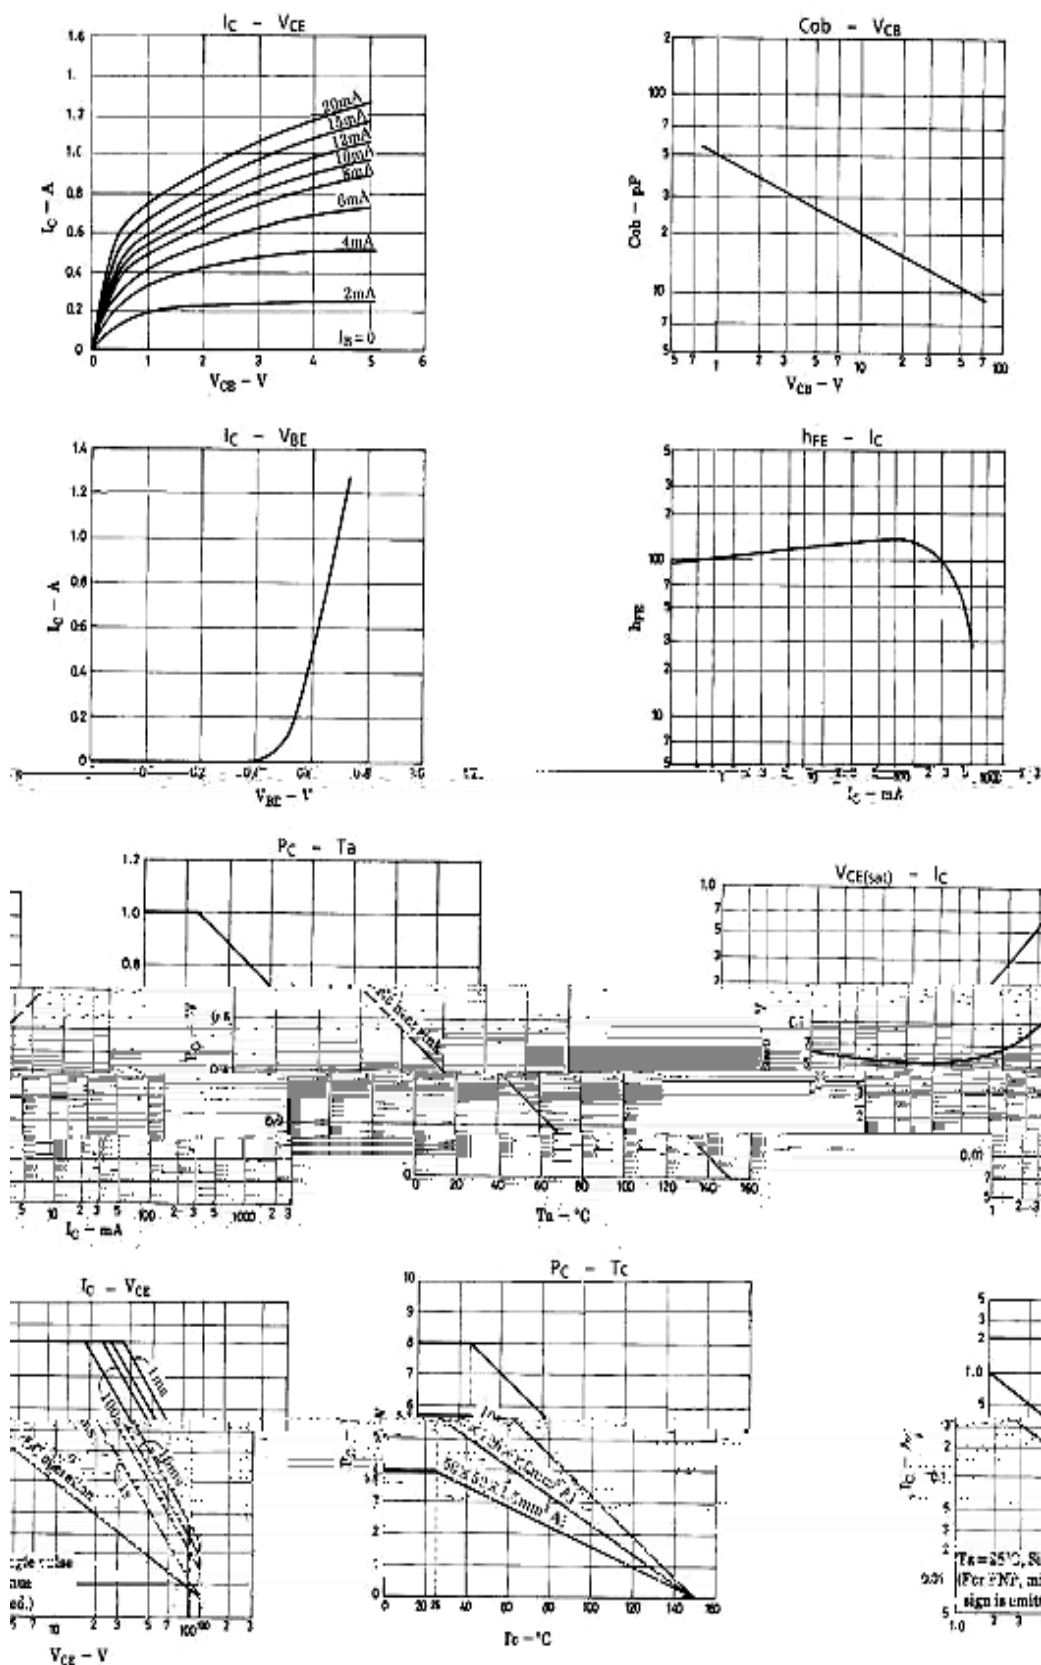

/ Package Dimensions


T□-126F

单位: mm

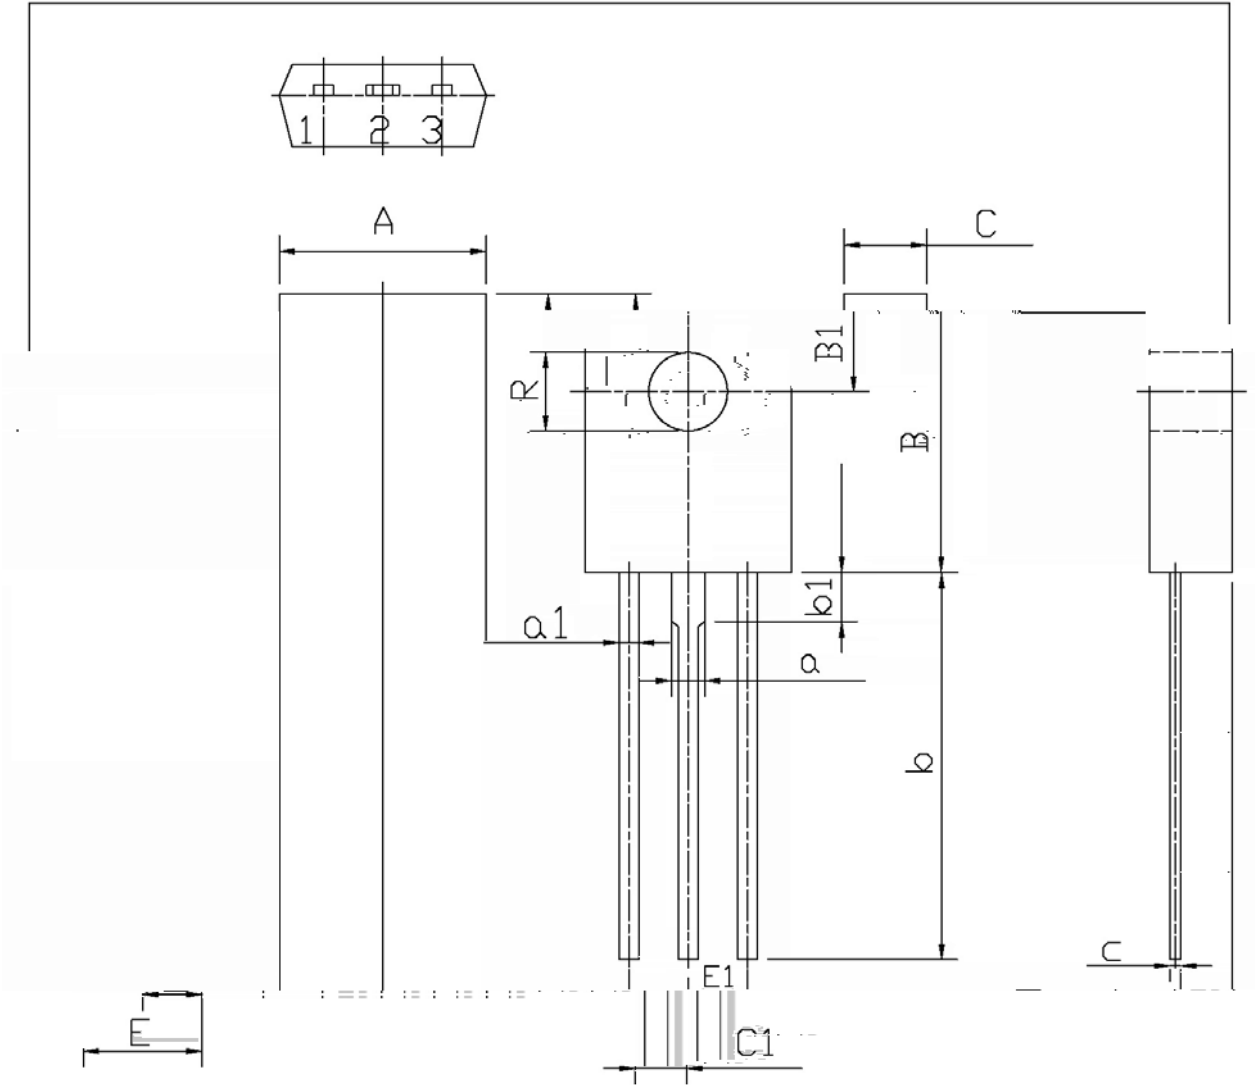


Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters		Symbol
	Min	Max		Min	Max	
A	7.8	8.2	a1	0.66	0.86	A
B	10.8	11.2	E	4.4	4.8	B
C	3.8	4.2	C1	3.1	3.3	C
a	2.95	3.15		1.9	2.1	a
b	14	16		0.3	0.5	b
	b1	1.9	a	1.27		
	E1	2.1	2.5			

/ Marking Instructions

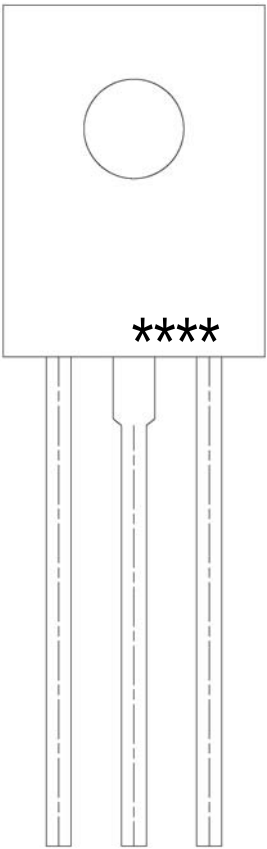

() / Temperature Profile for Dip Soldering(Pb-Free)

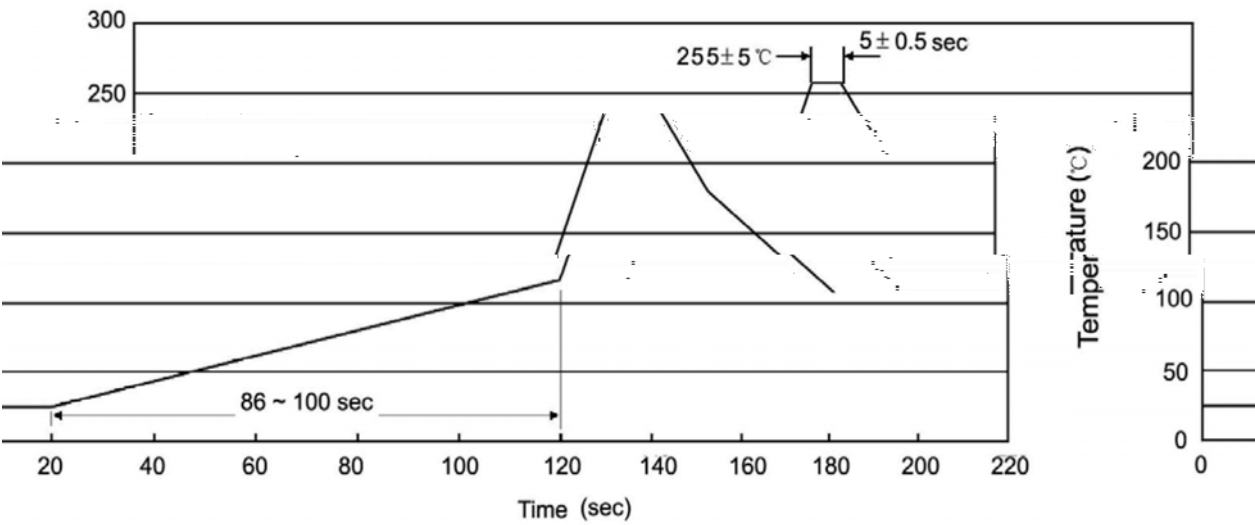

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

封装形式	包装数量	包装尺寸