


BR79D12Q

/ / Equivalent Circuit or Application of au0 for JT2 1 Tf477s of au3

	θ		
	θ		

≤

/ Package Dimensions

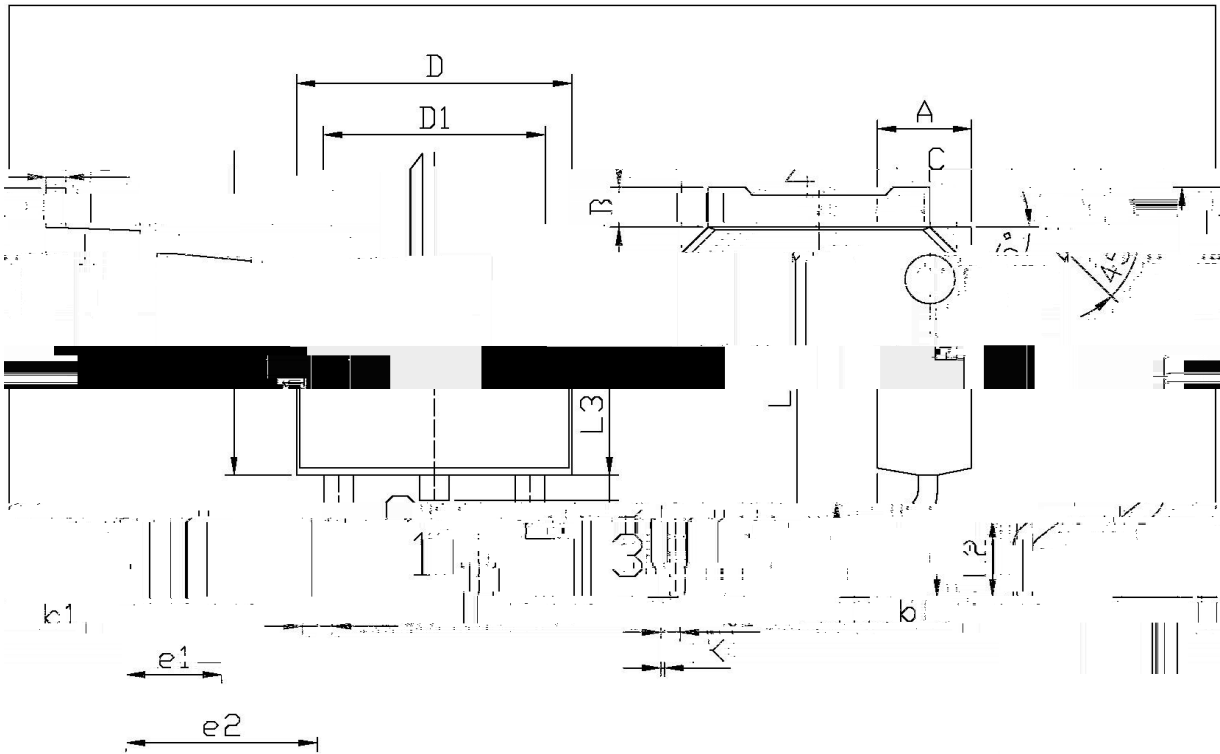


单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
F	5.95	6.25	B	2.20	2.40
e1	2.24	2.34	B1	0.95	1.25
e2	4.72	4.72	k1	0.70	0.90
F1	9.85	10.35	b1	0.45	0.55
G	1.15	1.55	L2	1.70	2.00
L3	0.60	0.90	P	6.45	6.75
K	0.00	0.10	D1	5.10	5.50


52

T□=2

/ Marking Instructions

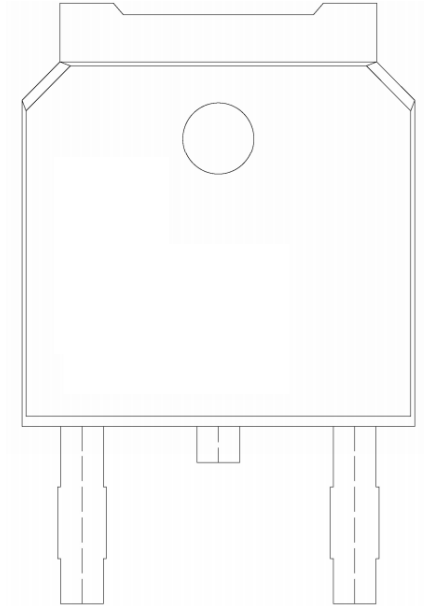

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

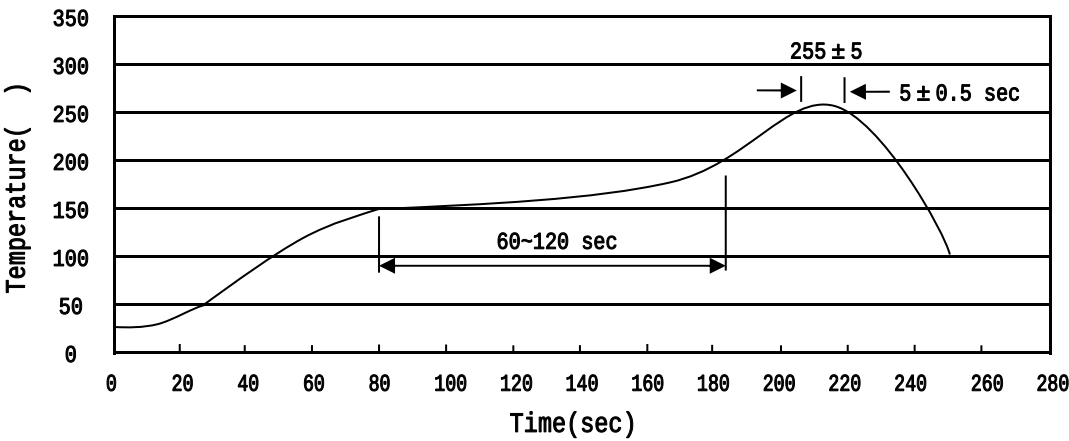

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices