


/ Descriptions**/ Features****/ Applications**

AC/DC


/ Equivalent Circuit**/ Pinning****/ h_{FE} Classifications & Marking**

	℃		
	℃		
	℃		


--	--	--	--	--	--	--

μ

/ Electrical Characteristic Curve

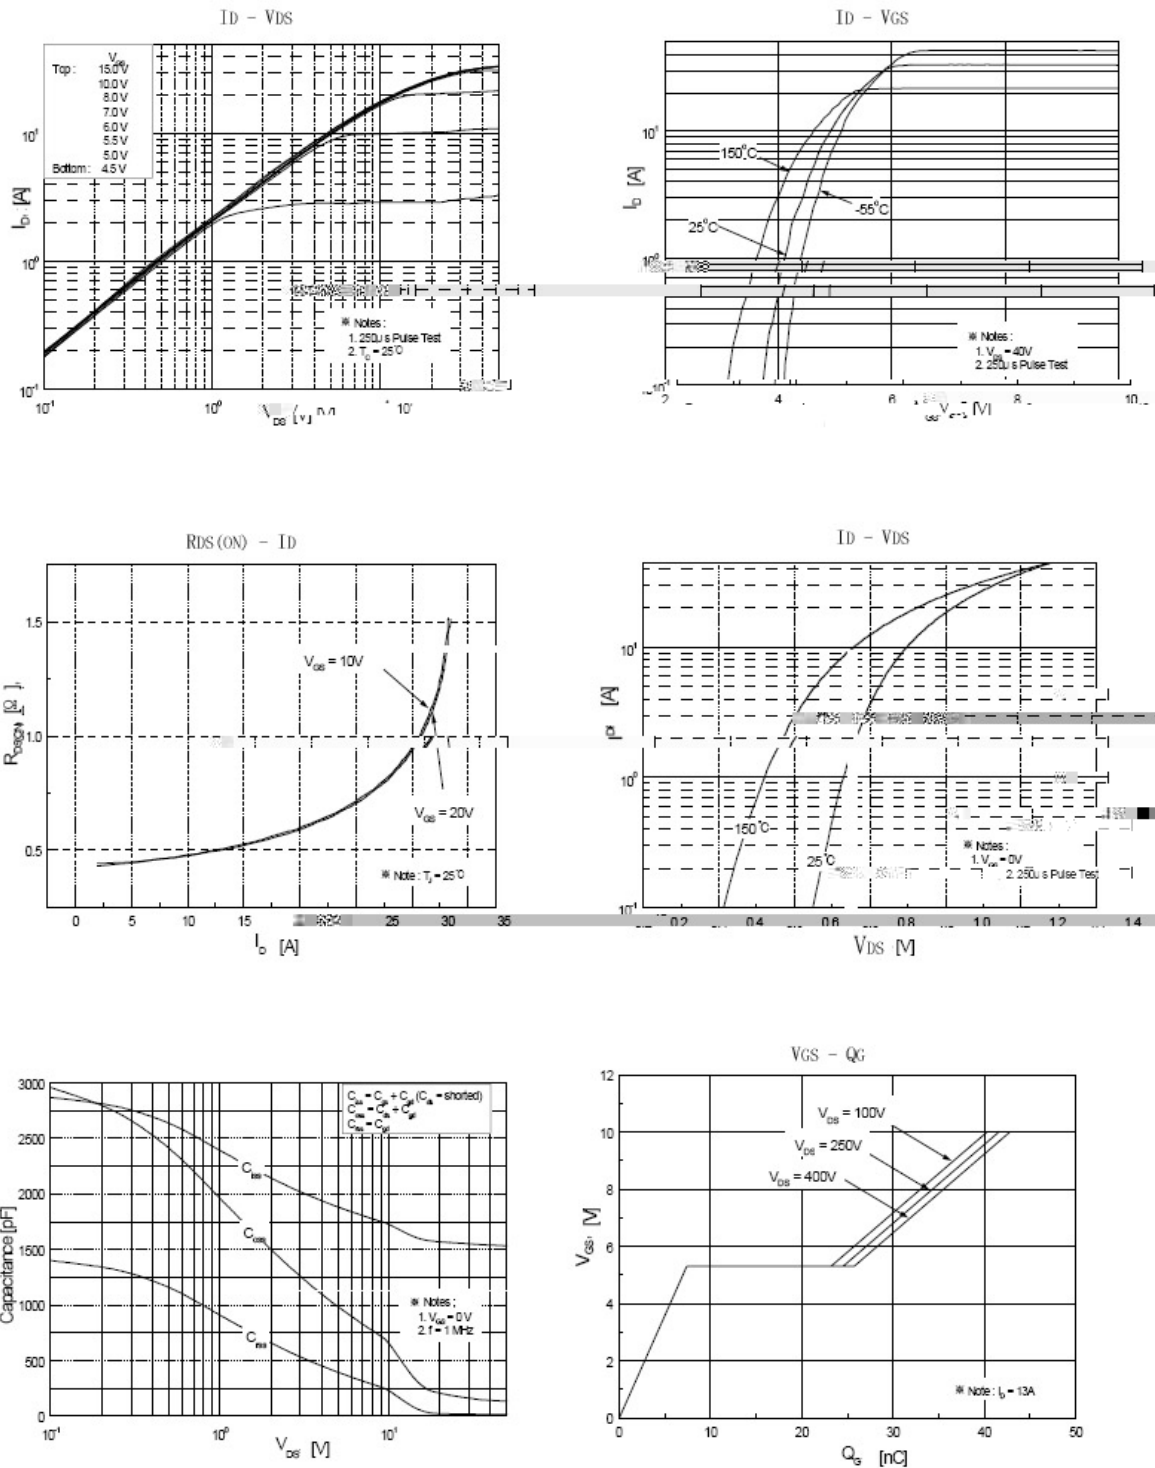


/ Package Dimensions

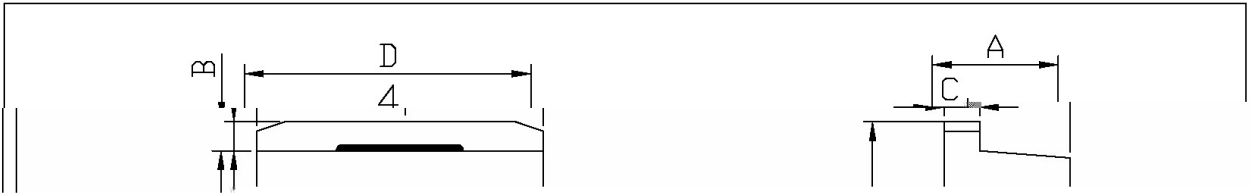


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.30	4.70	F	0.90	1.40
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	5.28

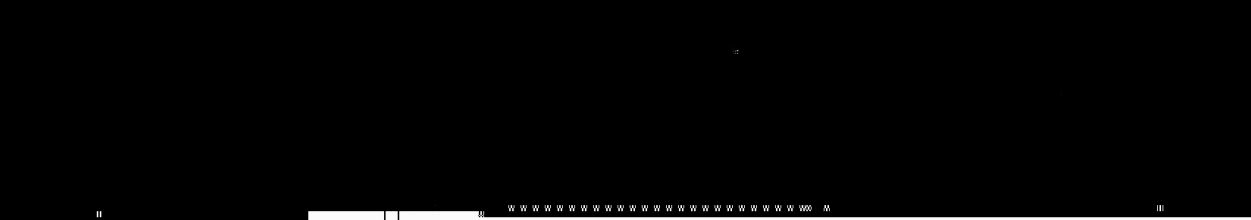


/ Marking Instructions

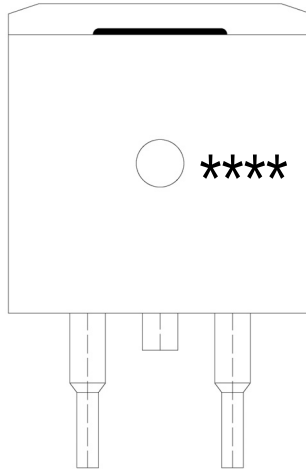

13N50

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

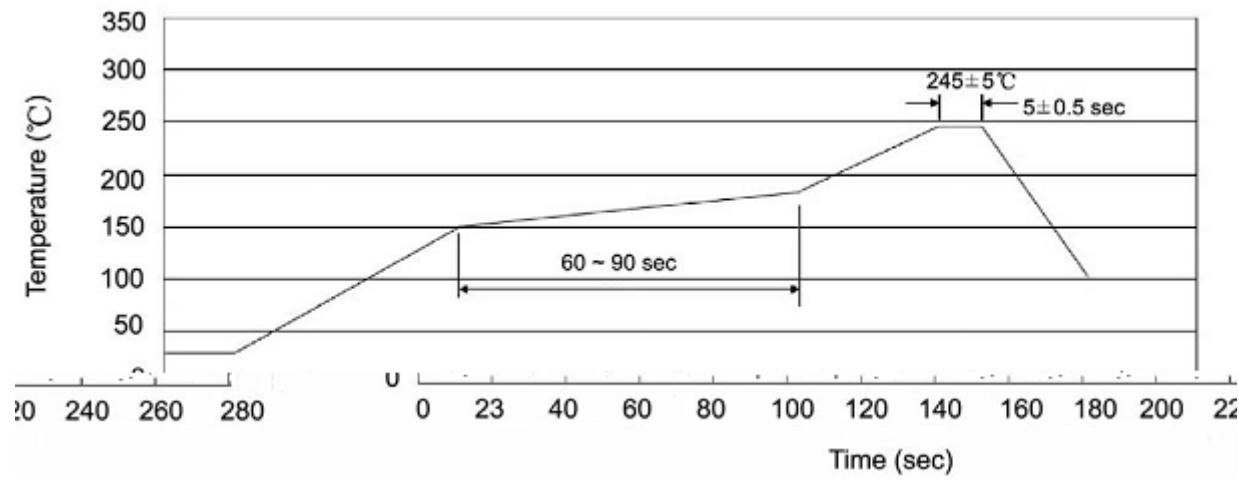

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13" ×24	360×360×50	385×257×392

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices