

/ Descriptions


/ Features

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆


/ Applications

- ◆ USB
- ◆
- ◆
- ◆

/ Application Circuit

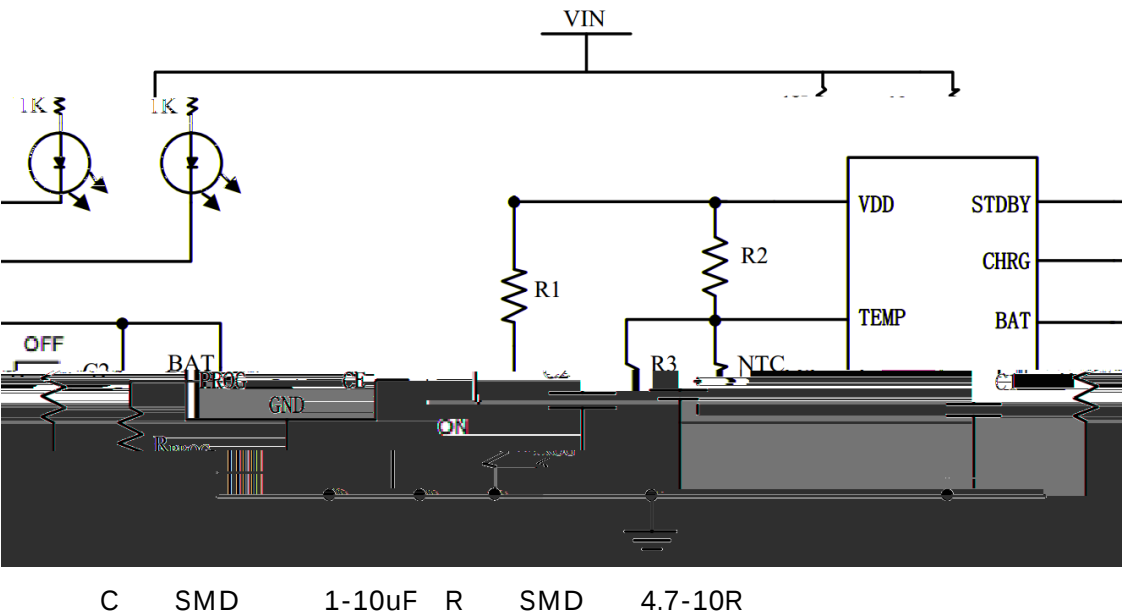

/ Pinning

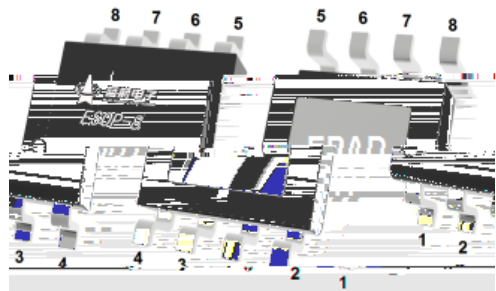

PIN Num.	Symbol	Function
	PROG	
		5V

/ Absolute Maximum Ratings(Ta=25℃)


PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Power Suplly						

/ Electrical Characteristics(Ta=25℃)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Indicator Pin Status CHRG/STDBY						
Internal Temperature Compensation						
		TEMP NTC				
		TEMP NTC				

/ Principle block diagram

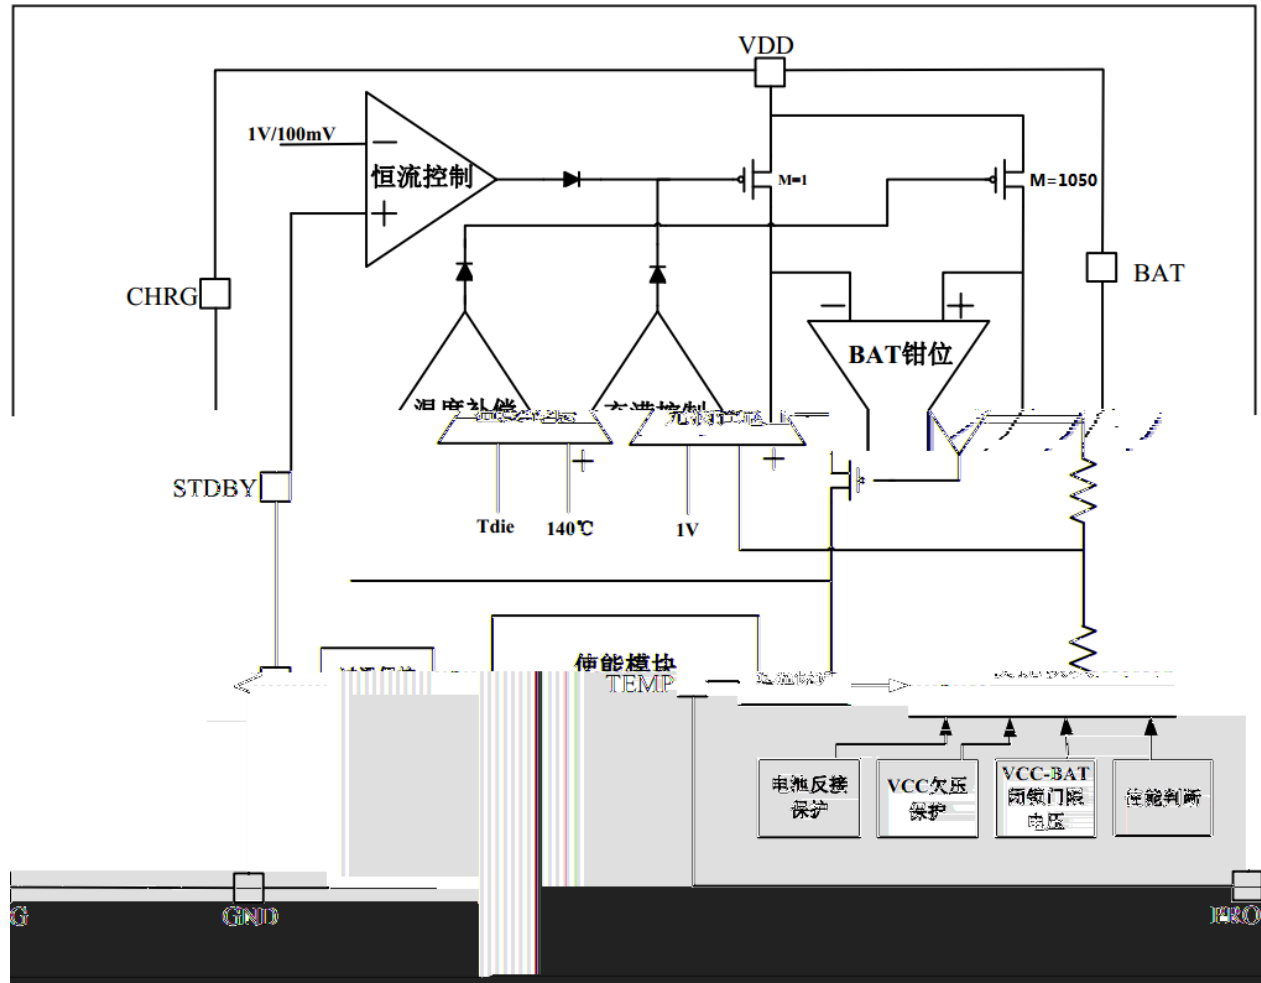

◆

◆

◆

Ω

/ Function description

◆


◆

◆


◆

(TEMP)		
VDD		

/ Package Dimensions

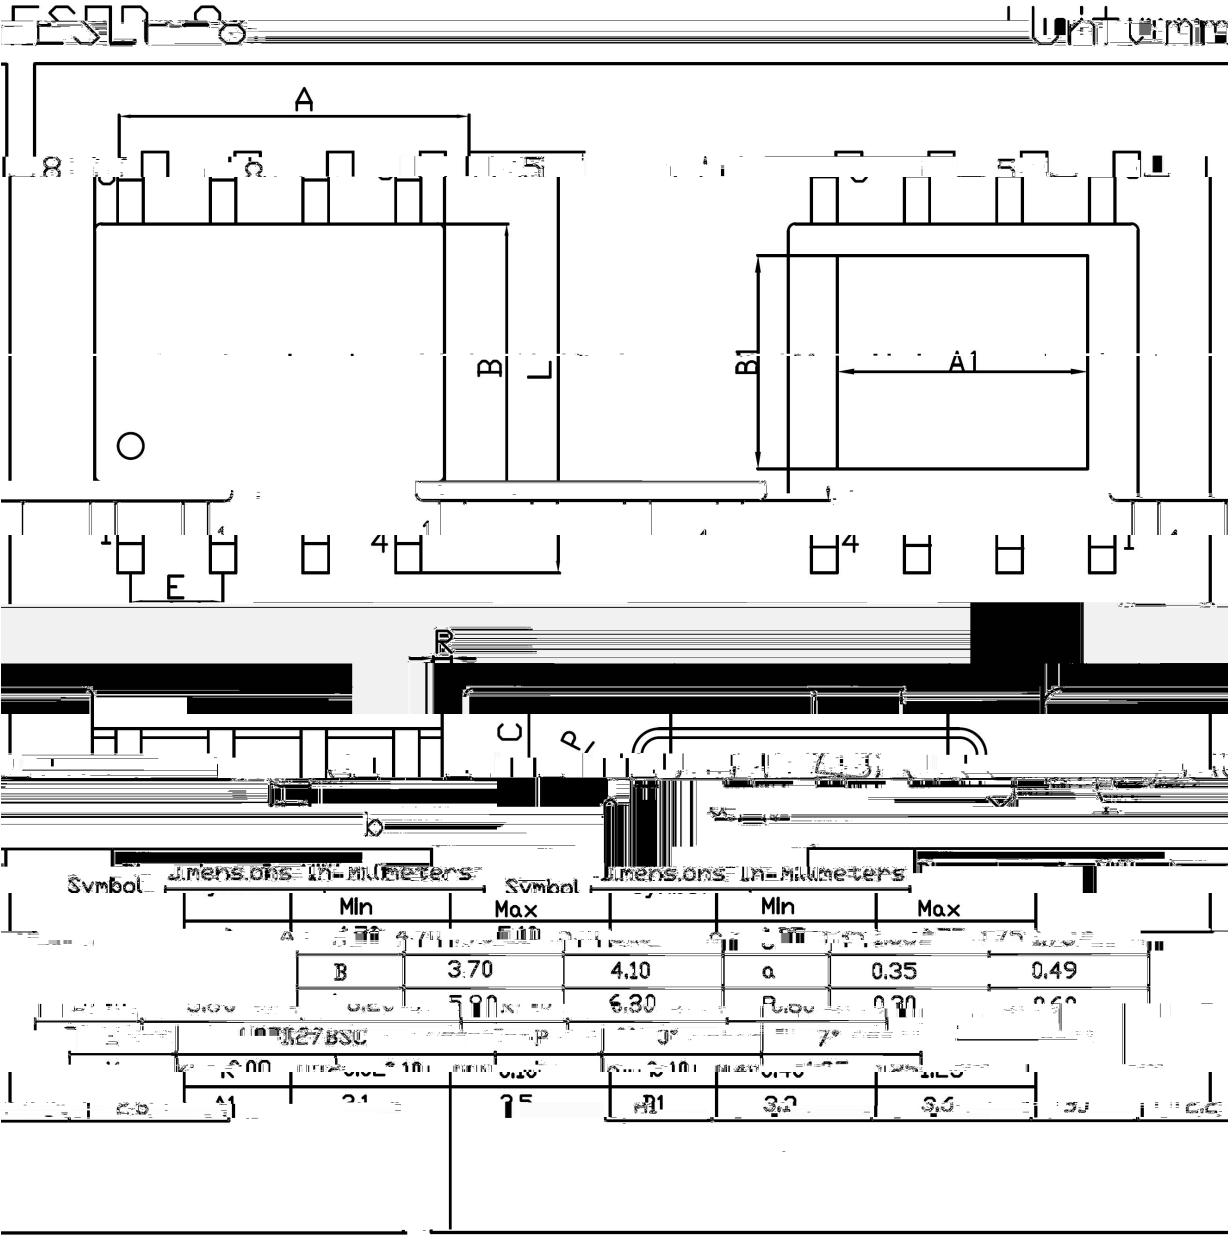


/ Marking Instructions

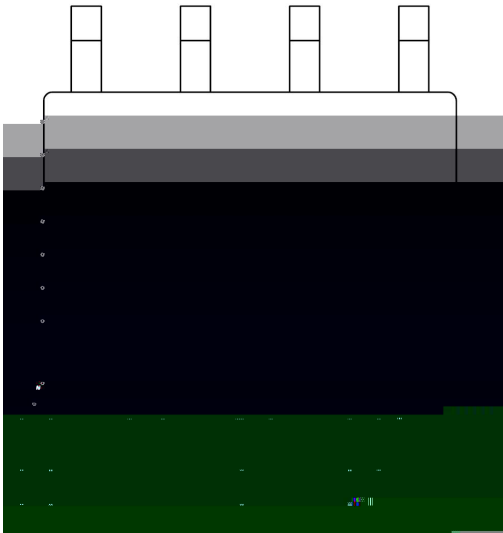

BR
4070
XX

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

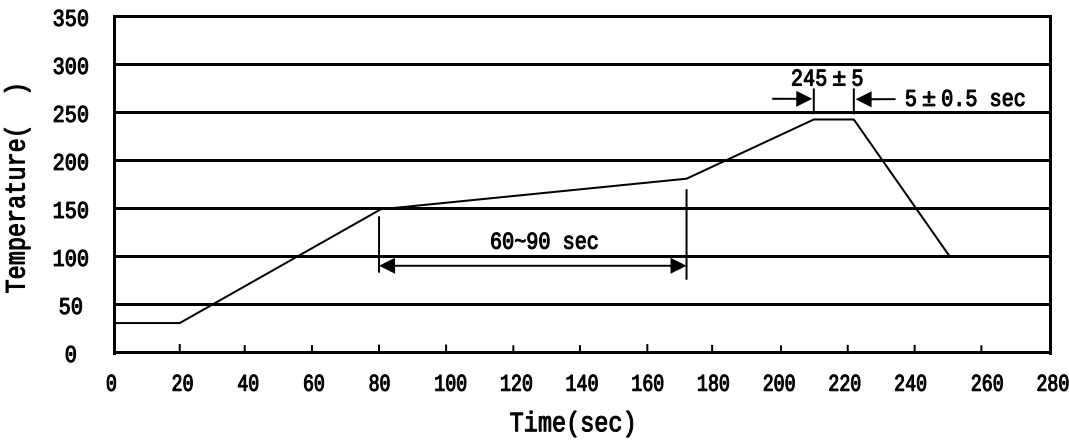

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		

/ Notices