


/ Descriptions

/ Features


		$\pm$
$\leq$	Ω	Ω
$\leq$	Ω	Ω

/ Applications

/ Equivalent Circuit



/ Pinning

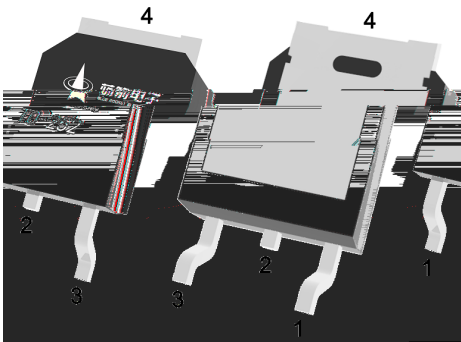

/ Marking




	θ		
	θ		

		μ				
						μ
						μ
		μ				
						Ω
						Ω

/ Electrical Characteristics(Ta=25)

		Ω Ω				




/ Electrical Characteristic Curve

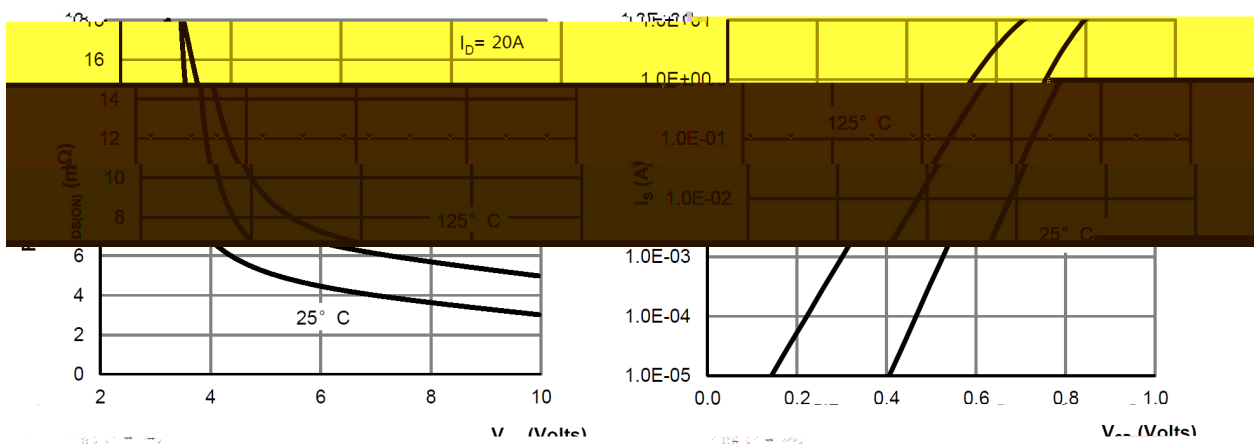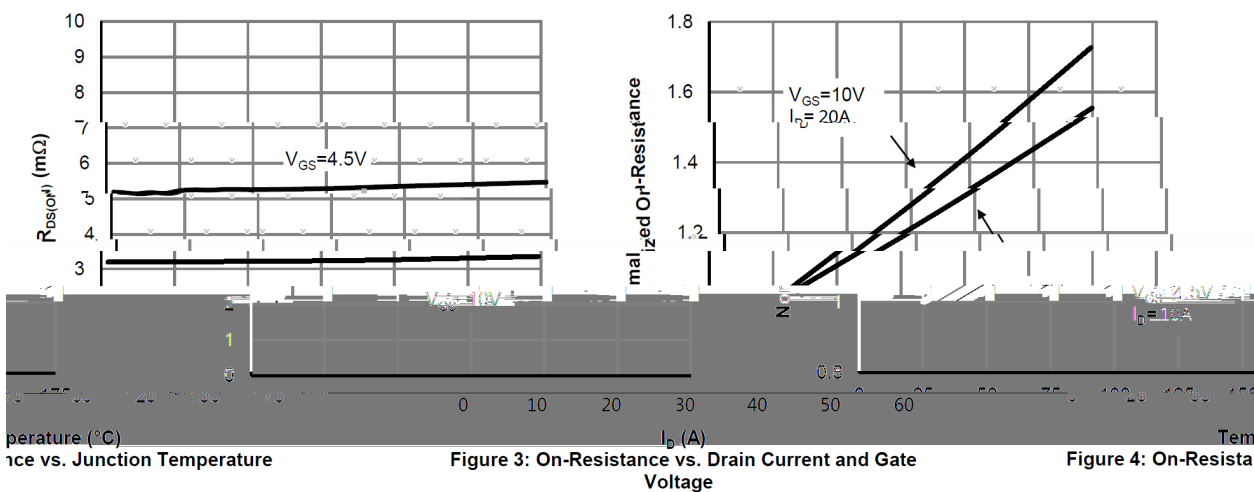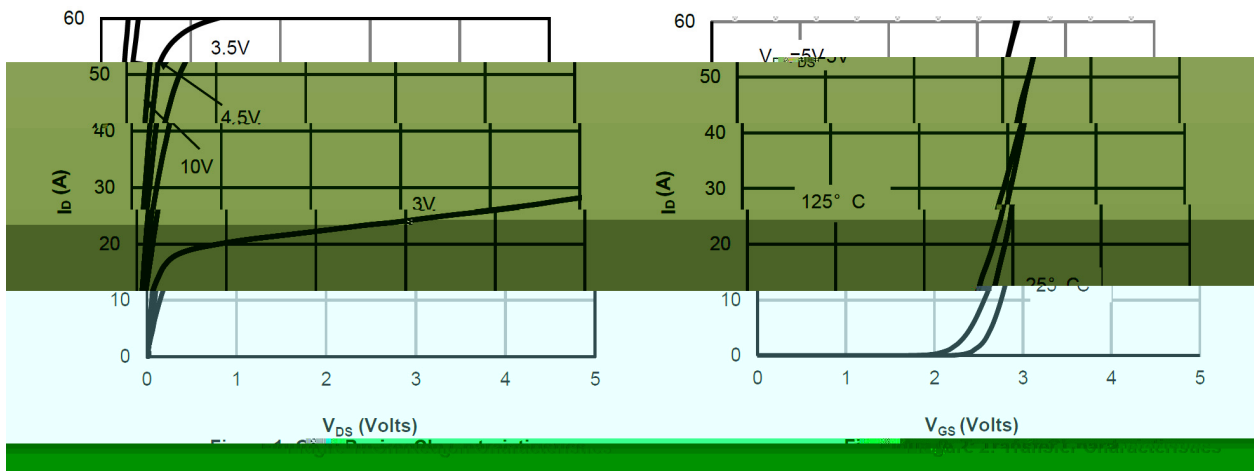


6: Body-Diode Characteristics

Figure 5: On-Resistance vs. Gate-Source Voltage

/ Electrical Characteristic Curve

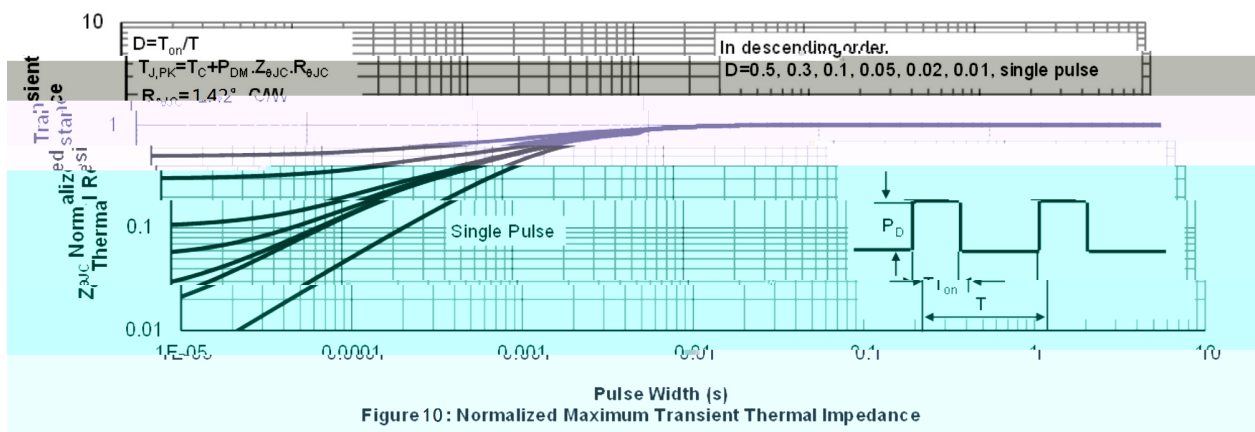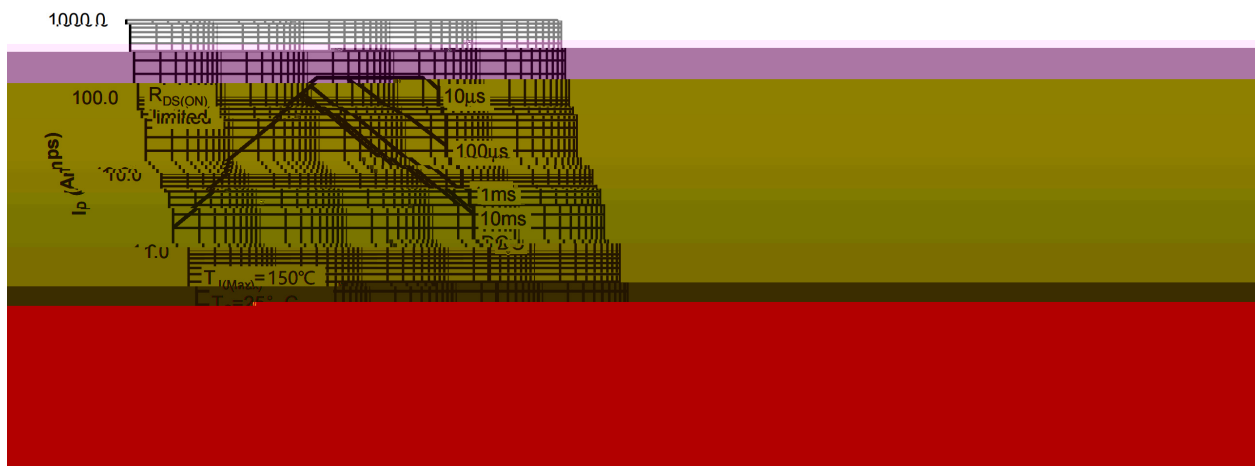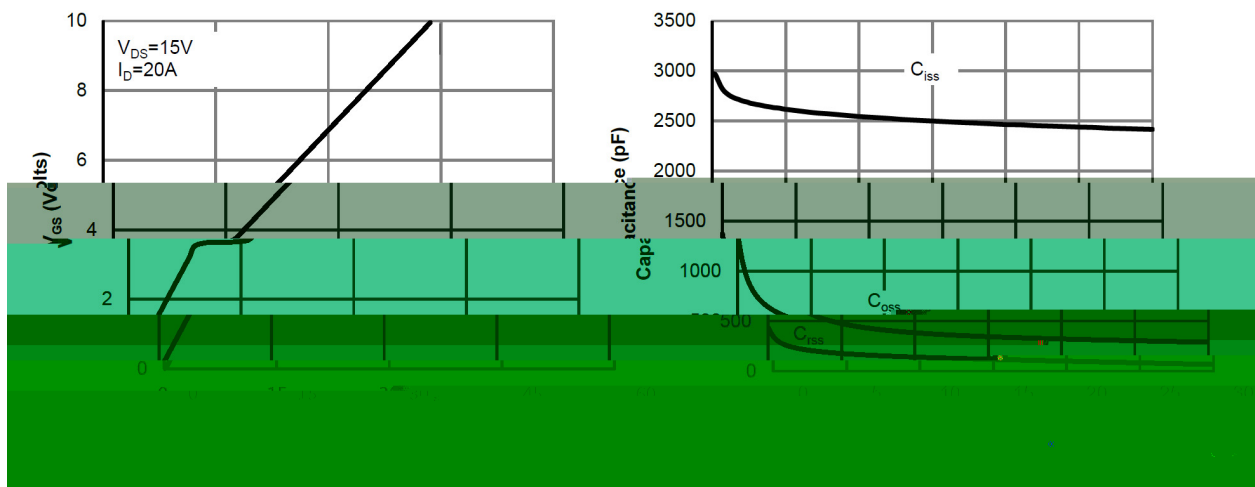

/ Package Dimensions

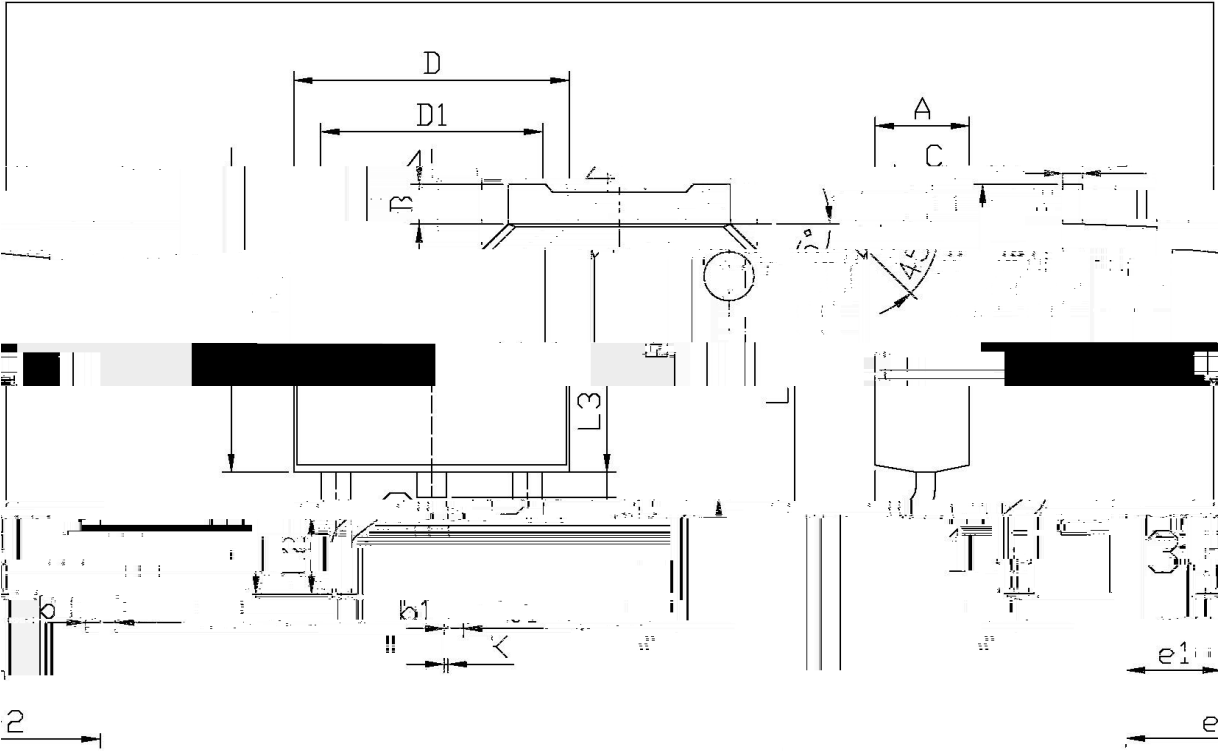


单位: mm

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
A	2.24	2.34		B	0.95	1.25	e
C	4.23	4.73		D	0.70	0.90	e1
E	9.85	10.35		b1	0.45	0.55	
L3	0.55	0.70	0.80	K	1.70	2.00	
D	6.45	6.75	0.1				
D1	5.10	5.50	0.1				

TO-252

/ Marking Instructions

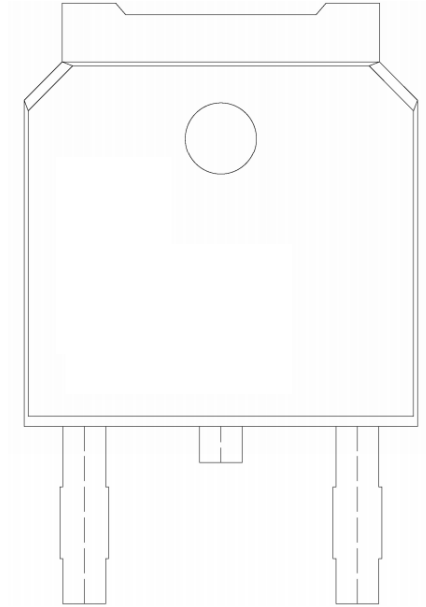

() /



/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices