

/ Revised record

[illegible]

/ Descriptions


/ Features

$R_{DS(on)}$ C_{rss}


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning



/ Marking

参

	□		
	℃		
	℃		
			℃
			℃
			℃



值 测

	□				参	
		℃				
		℃				




	□				参	

值 测


/ Electrical Characteristic Curve

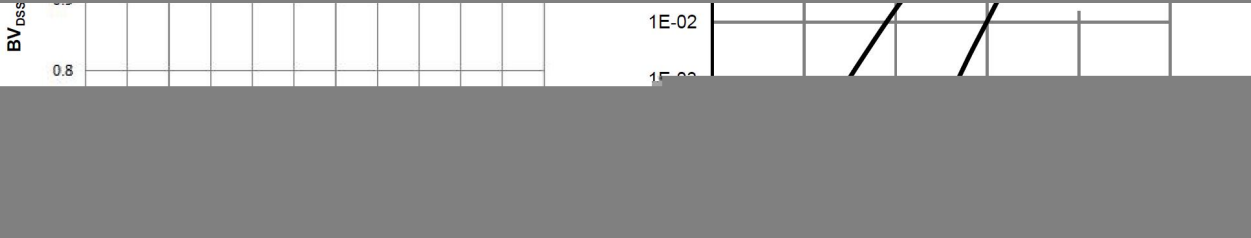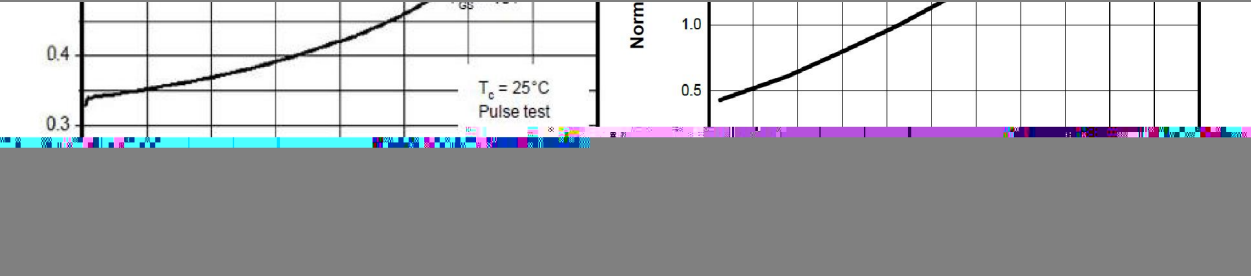

/ Electrical Characteristic Curve

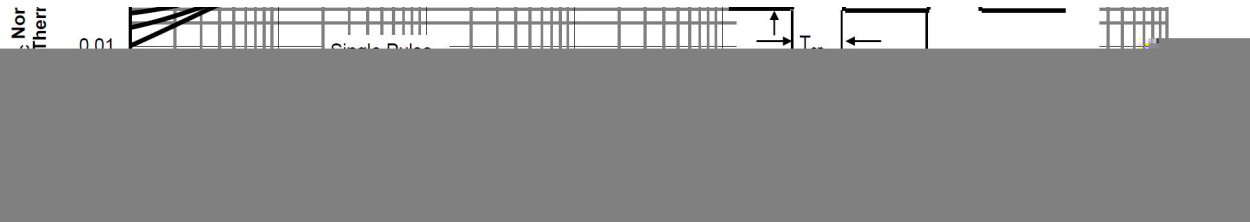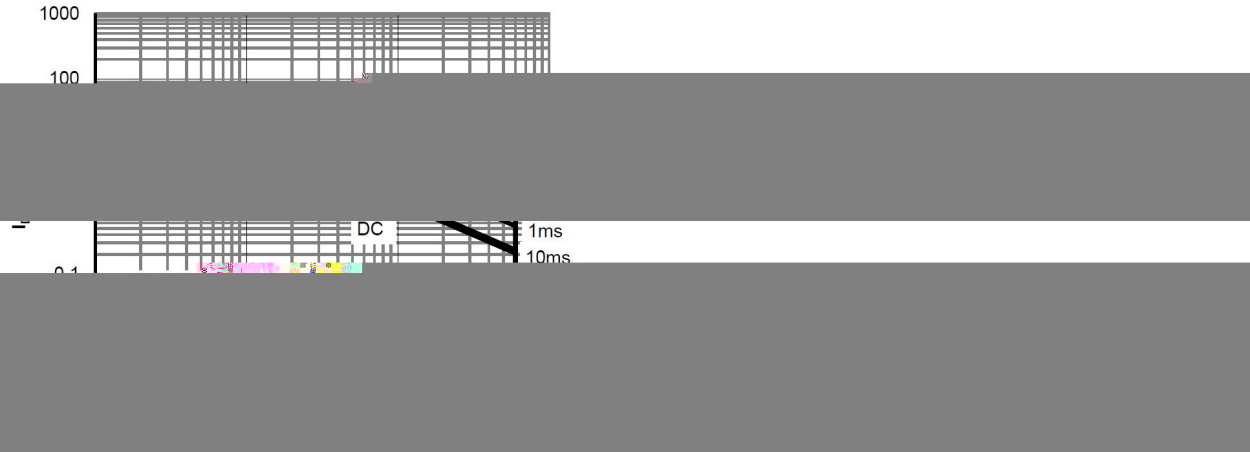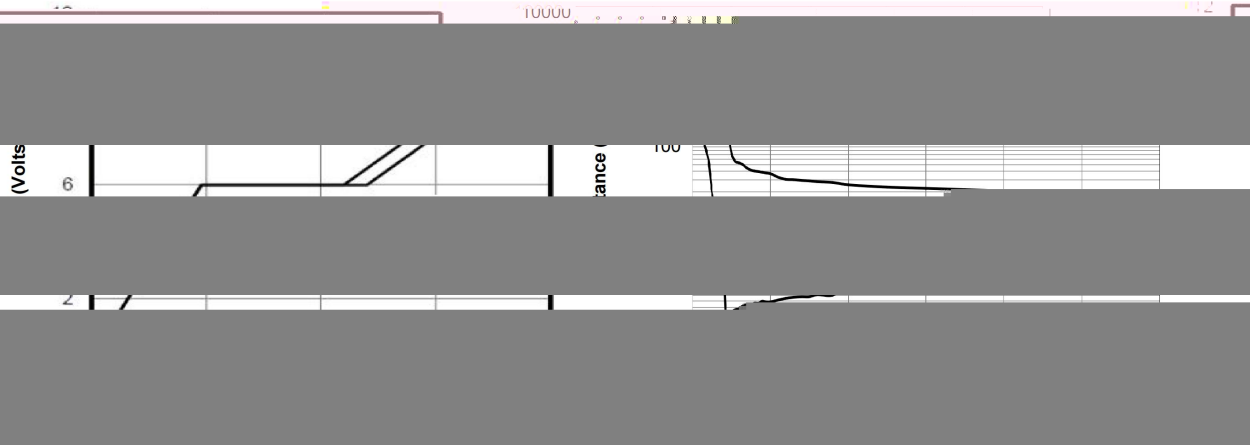

/ Package Dimensions

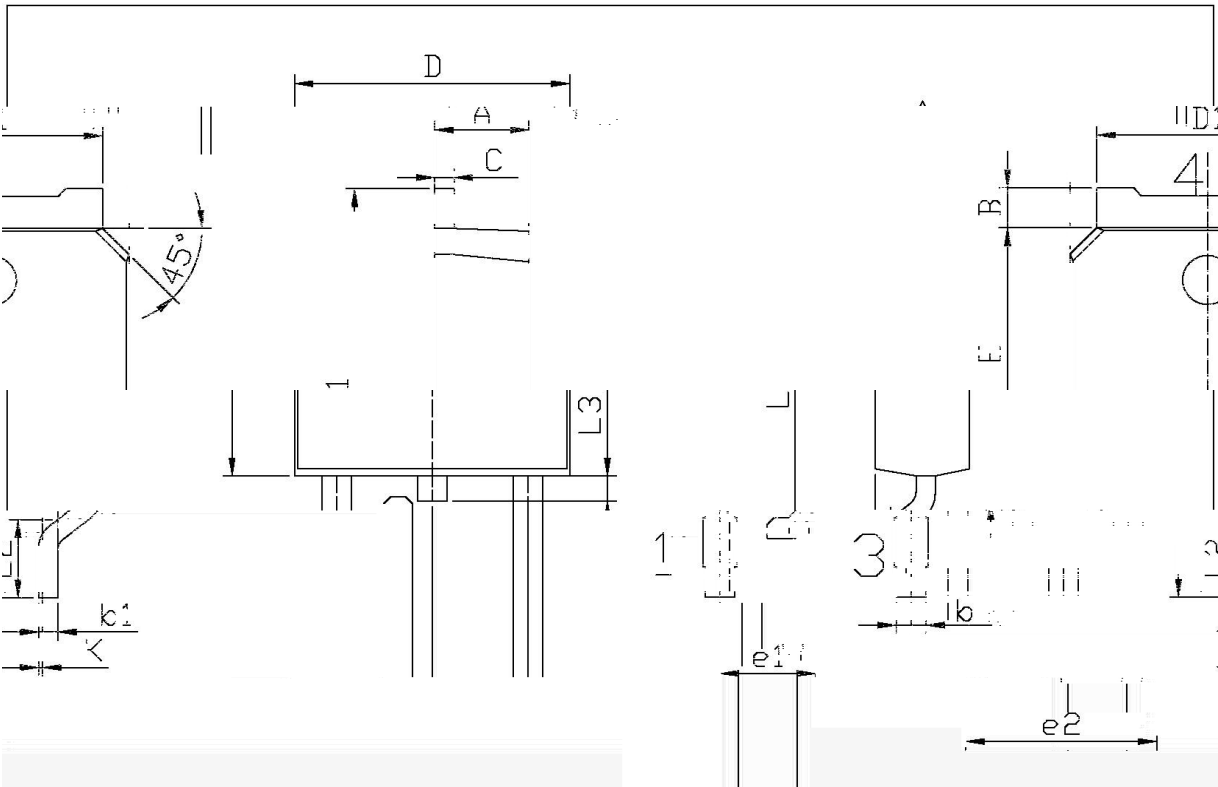


单位: mm

Dimensions in Millimeters	Dimensions in Inches	Dimensions in Millimeters	Dimensions in Inches
M 3.95	0.155	M 3.95	0.155
2.24	0.088	2.24	0.088
6.75	0.266	6.75	0.266
1.70	0.067	1.70	0.067
2.00	0.079	2.00	0.079
0.60	0.024	0.60	0.024
0.45	0.018	0.45	0.018
0.55	0.022	0.55	0.022
1.2	0.047	1.2	0.047
6.45	0.254	6.45	0.254
10	0.394	10	0.394

TN-252

/ Marking Instructions

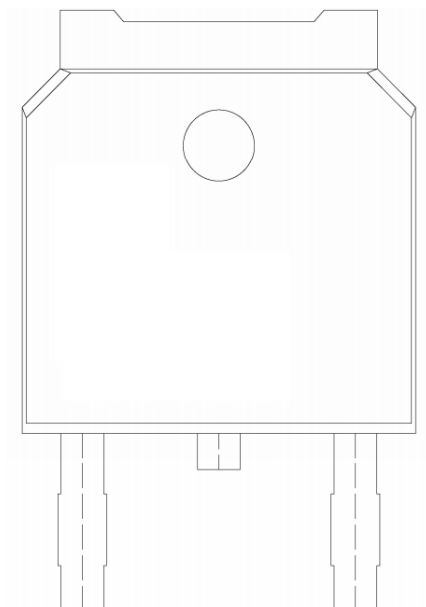

() /

±

°C

±

°C

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

±

°C

±

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱				