



$$\leq \Omega \quad \Omega$$

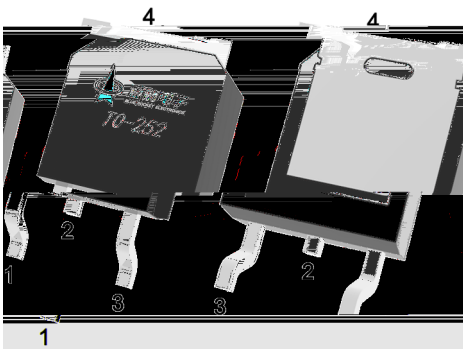


	θ		
	θ		


		μ				
						μ
		μ				
						Ω
						Ω




		Ω				
		μ				

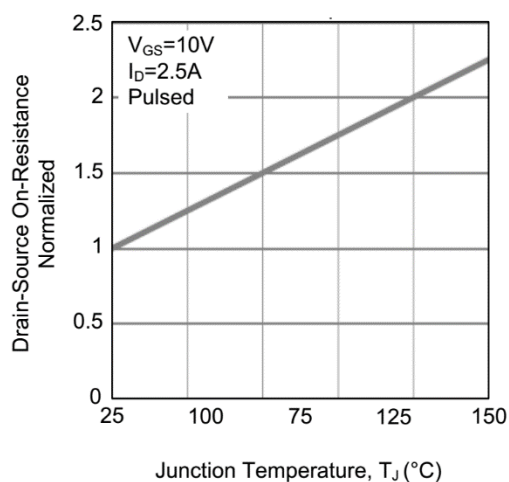


1. Drain-Source On-Resistance vs. Junction Temperature

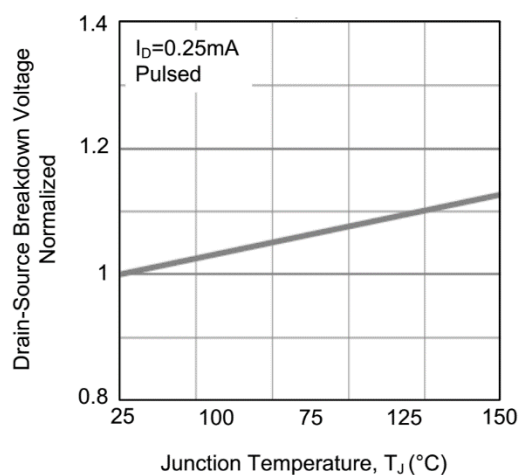


2. Breakdown Voltage vs. Junction Temperature

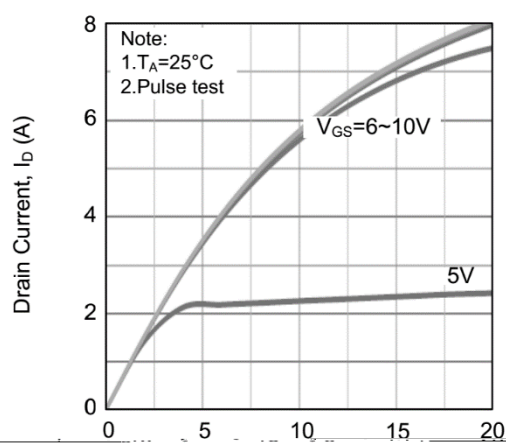


4. Drain Current vs. Gate-Source Voltage

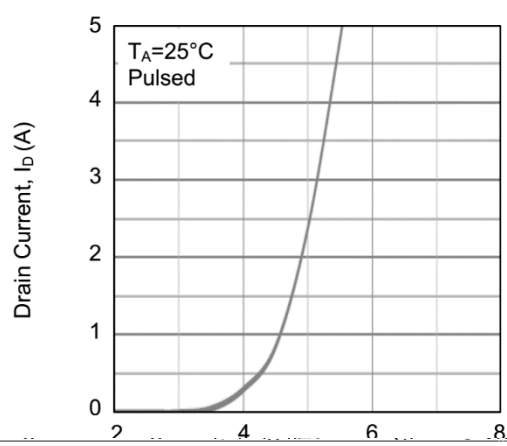


3. Drain Current vs. Drain-Source Voltage

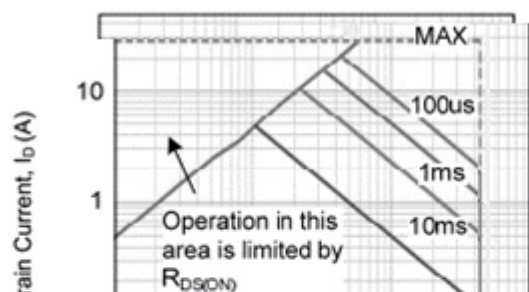

5. Safe Operating Area

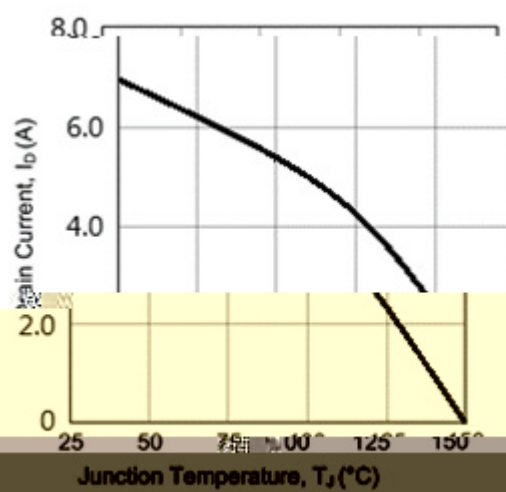


6. Drain Current vs. Junction Temperature

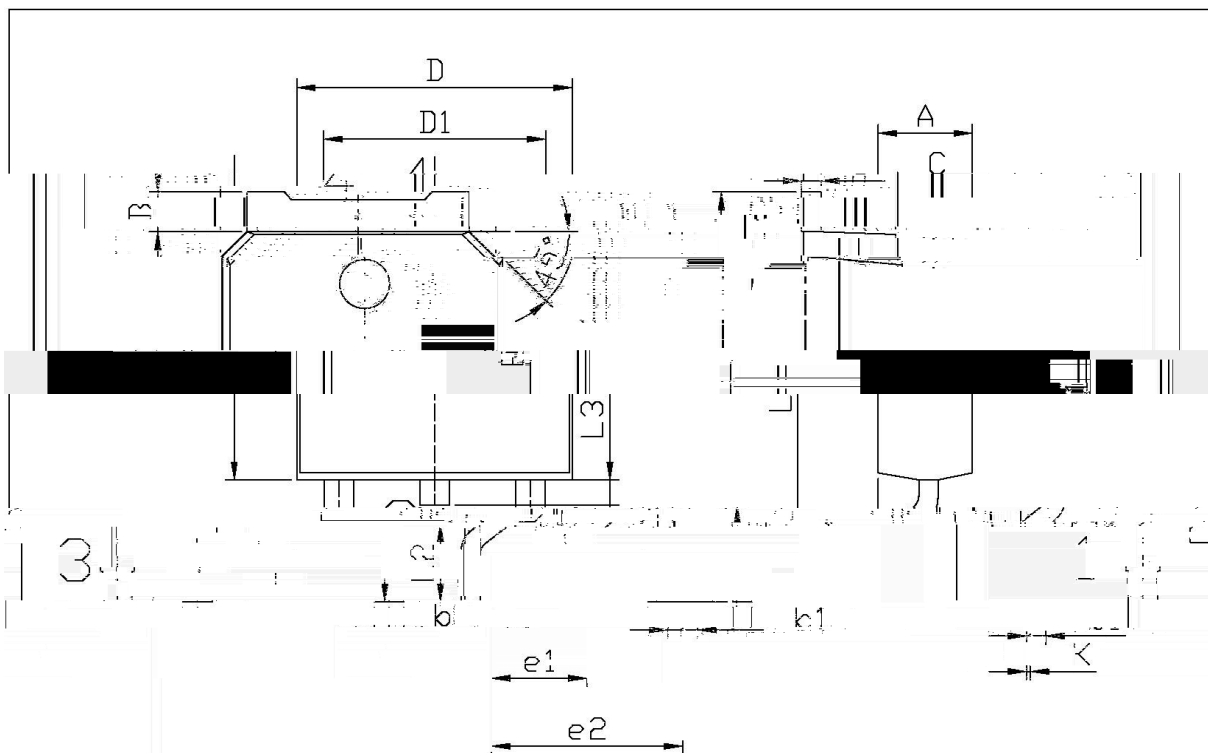

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
6.25	A	2.20	2.40	E	5.95
2.34	B	0.95	1.25	e1	2.24
1.73	b	0.70	0.60	h	4.78
9.85	10.35	b1	0.45	0.55	L1
C	0.45	55	12	1.70	2.00
0.60	0.90	p	6.45	6.75	P
0.00	0.10	D1	5.10	5.50	

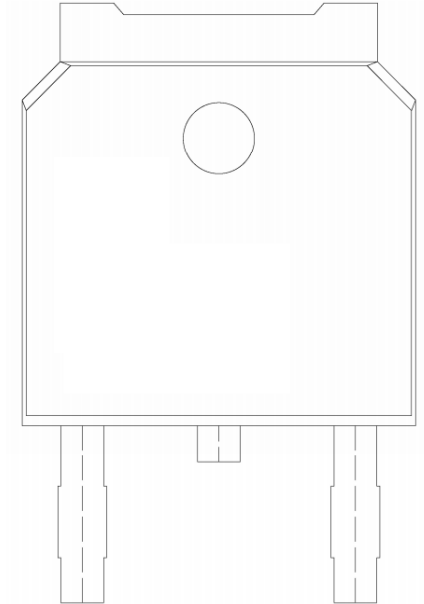

Temperature Profile for IR Reflow Soldering(Pb-Free)

