

5 é / Descriptions

:5 .> // x Õ € ı E , ≥ } íoû


¤ ª / Features

z ı , >où3ì Ü © Éoù z ' y 9 èoù8U.9 D }oû


Ð ÷ / Applications

" J òoù J » òoù MCăoù ç ðoû

Ã W] Ô · / Equivalent Circuit



• Ũ - æ / Pinning

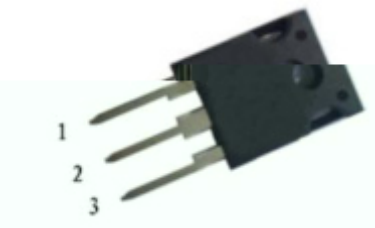

y

y

y

Z Ü B , M V / h_{FE} Classifications & Marking

- ~ ™ ¢oû

Absolute Maximum Ratings(Ta=25 ;)


@ É	Ö Z	É ð	% y
			-

Electrical Characteristics(Ta=25 ;)


@ É	Ö Z	y ° / ^	¬ 4 ð	i ∫ ð	¬ > ð	% y
	,					
		-				
		Ø -				

@ É	Ö Z	y ° / ^	¬ 4 ð	i f ð	¬ > ð	% y




Electrical Characteristic Curve

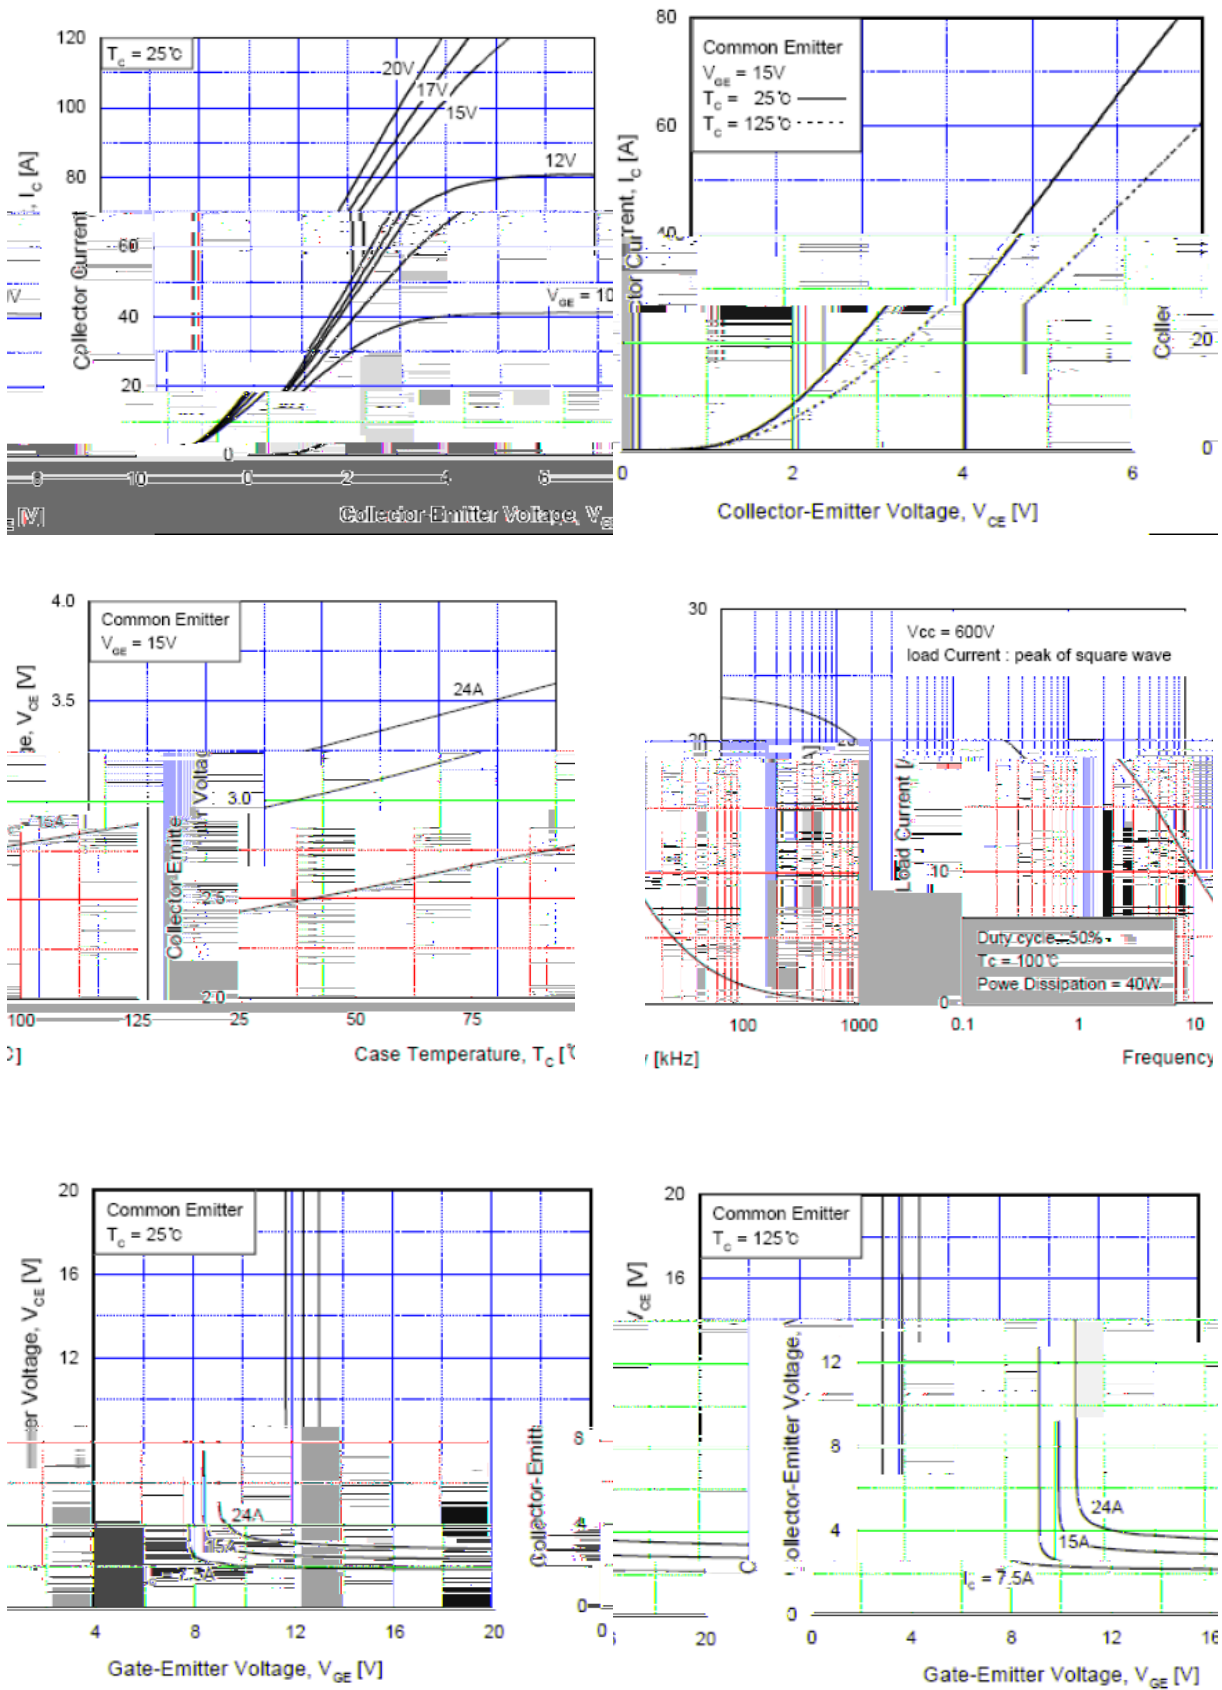

〇 ? d • Ž ċ / Electrical Characteristic Curve

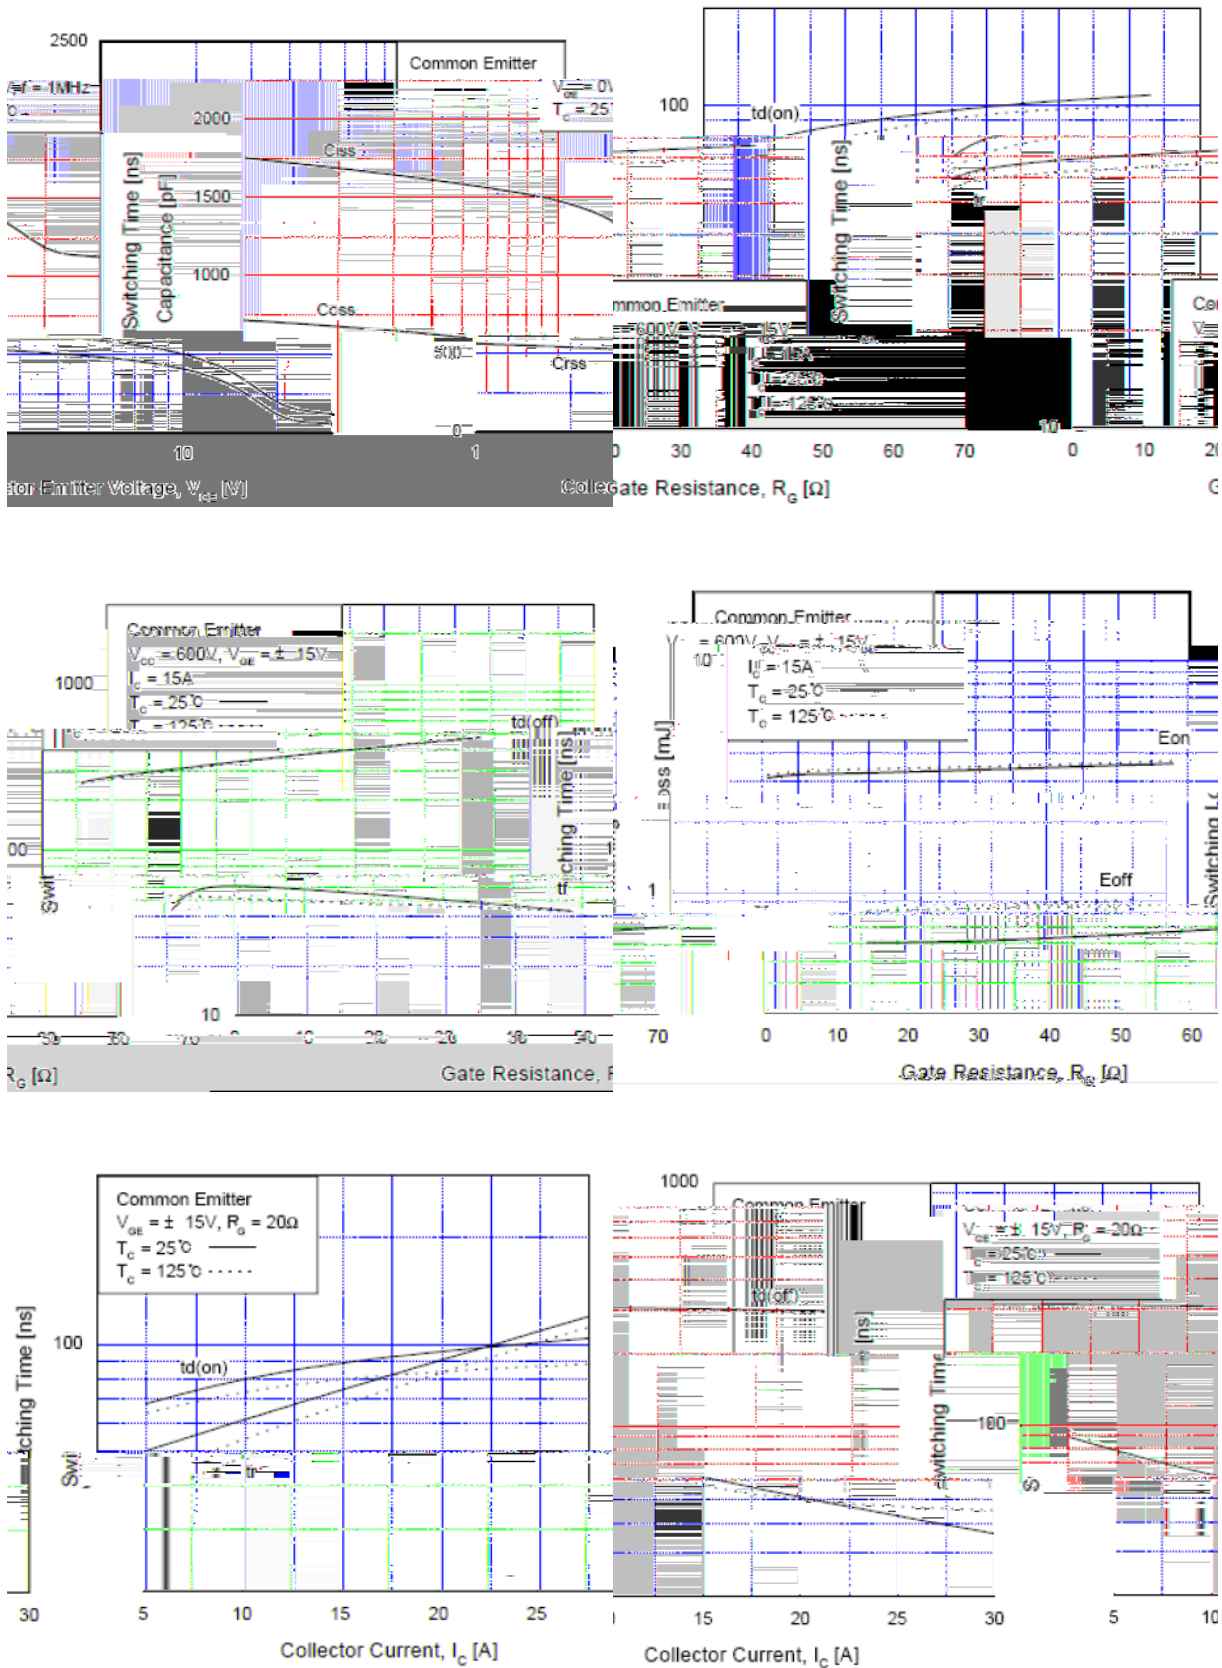

Electrical Characteristic Curve

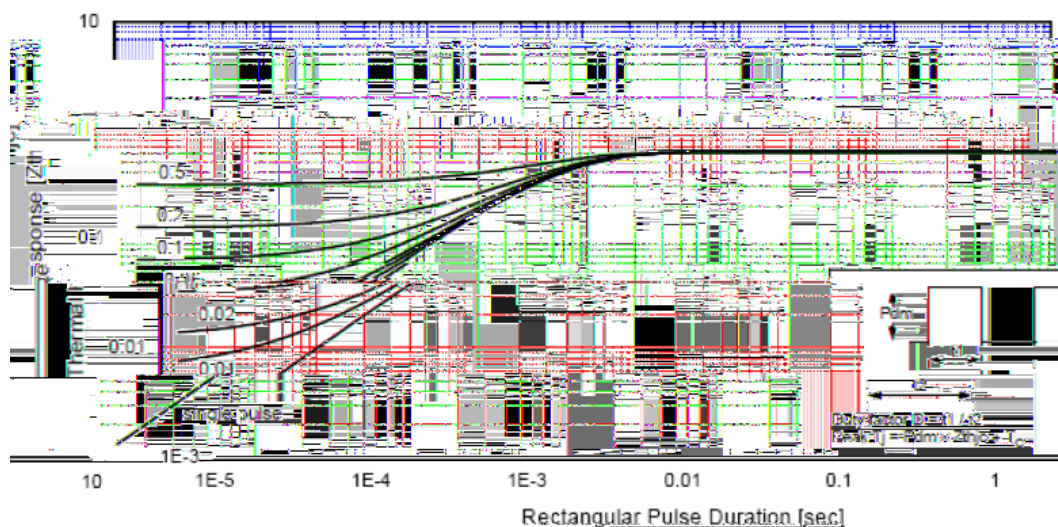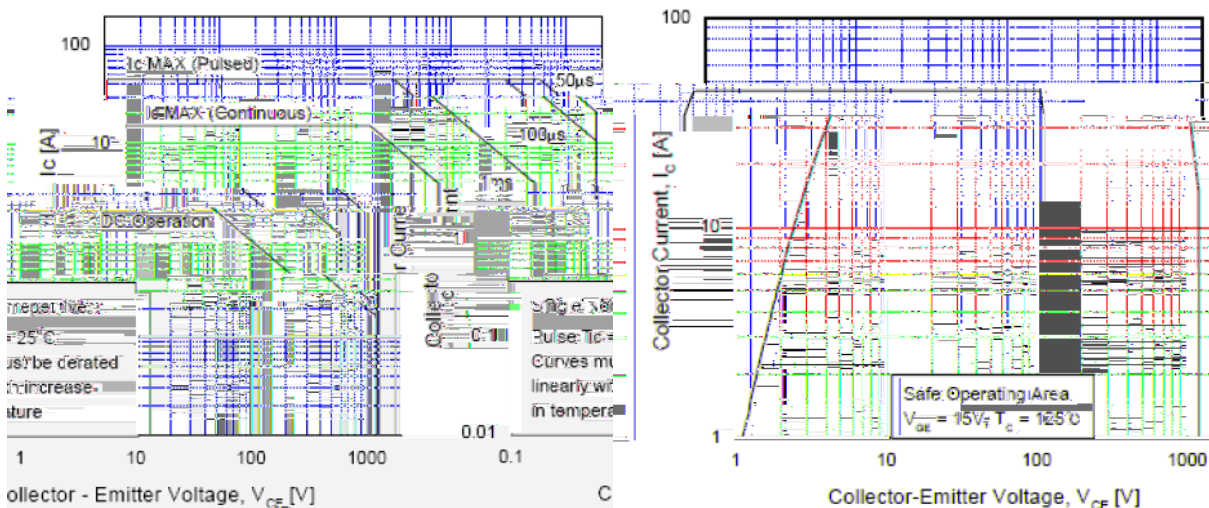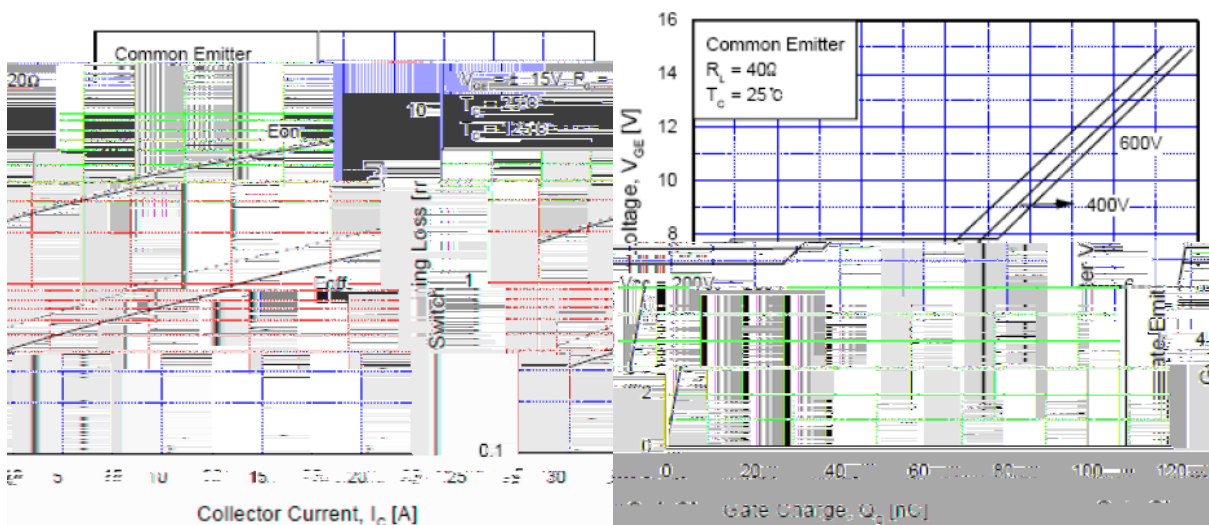


BRGH15N120D




DATA SHEET

Ø □ =) ♂ / Package Dimensions

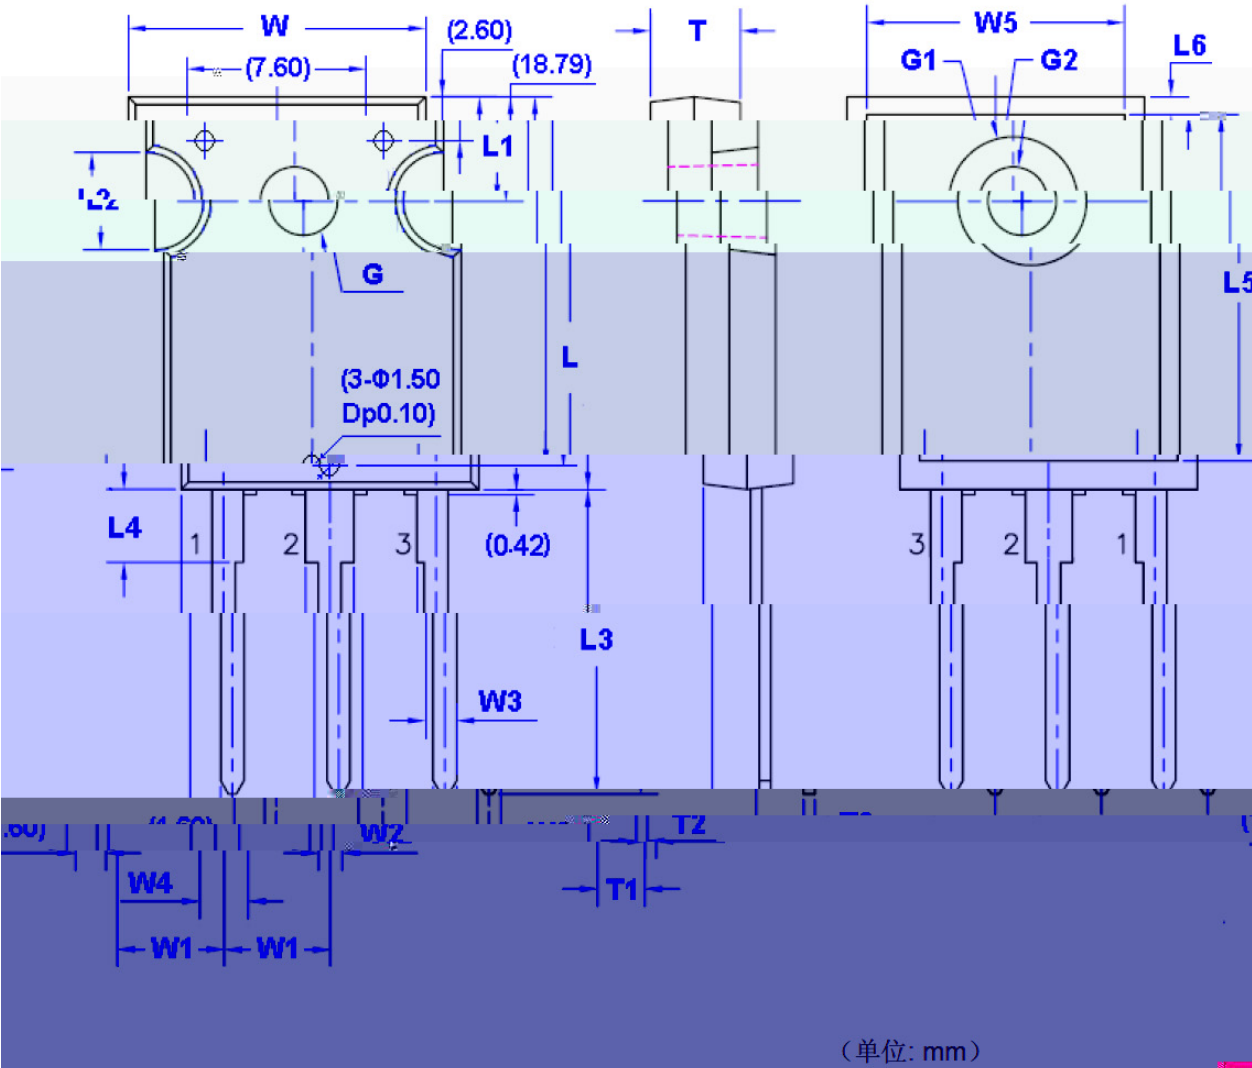


尺寸		尺寸		尺寸		尺寸					
符号	Min	Max	符号	Min	Max	符号	Min	Max			
W	10.37	13.67	W5	12.80	14.14	L4	3.05	3.93	L2	0.51	0.71
L1	5.55(TYP)	6.35	L3	22.93	22.93	L5	13.98	13.98	L6	3.51	3.55

, M y f / Marking Instructions

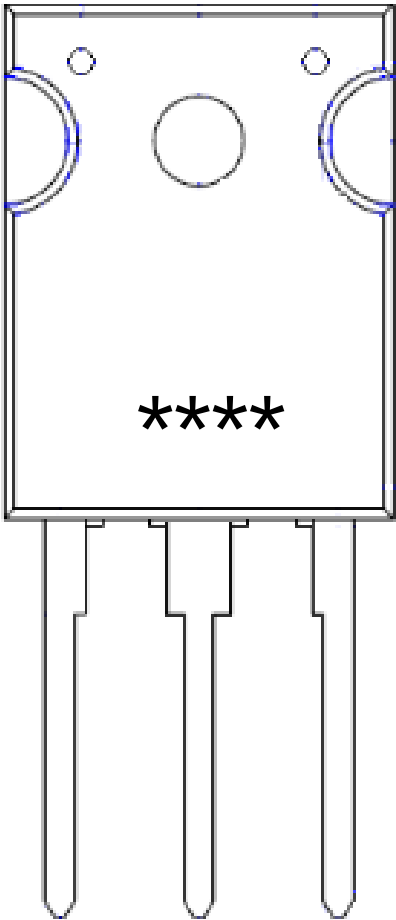

™ ¢ y
(8 Π [W A
- 4 * y D } } Z
y ~ D Z W A k ö ~ D Z J o û

G PD t ... • Ž Ğ (x /) / Temperature Profile for Dip Soldering(Pb-Free)

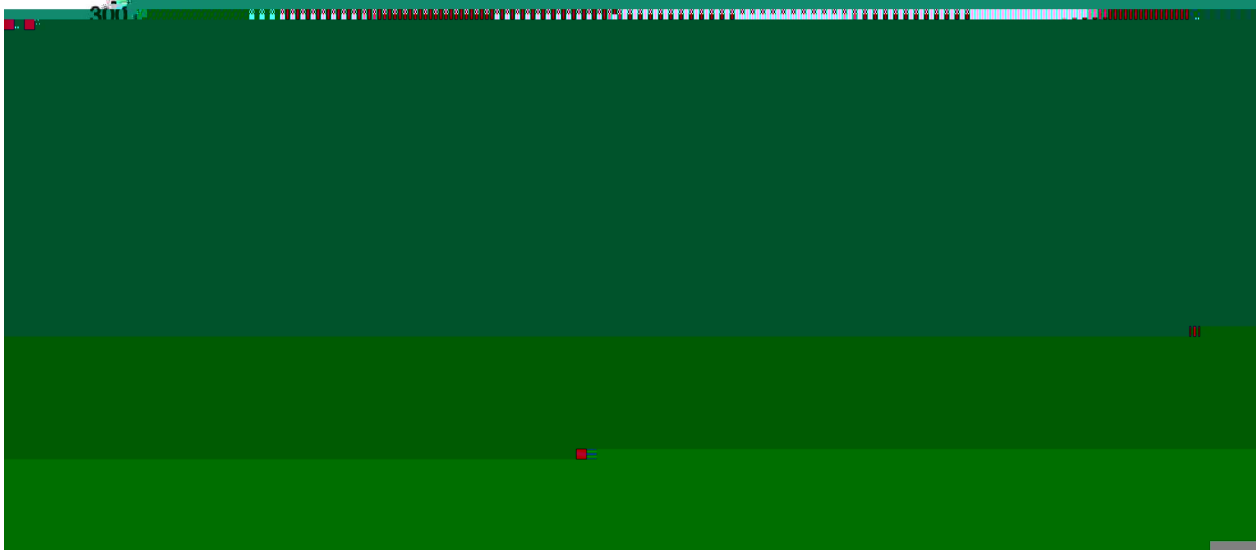 $\text{TM} \quad \text{¢} \quad y$

ou $f_{\Omega} \ddot{U} = k \hat{u} - \Omega^2 U$
 ou $Q \ddot{U} = k \hat{u} - 4 \frac{r}{r} U$
 ou $D_N \dot{U} = 0, \ddot{U} = \Omega^2 U$

AD /Cap⁻»] / Resistance to Soldering Heat Test Conditions

$$\hat{U}_y = r - \hat{u}_y = r$$

GP á / Packaging SPEC.

 $\ddot{I} \dot{I} \times$

β m ù ´	g m ô h					g m d Ê !		
	Units/Tube /Š •	Tubes/Inner Box Š • /ç	Units/Inner Box /ç	Inner Boxes/Outer Box ç /±	Units/Outer Box /±	Tube Š •	Inner Boxç	Outer Box±
TO-247	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180

„Dy f / Notices