

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

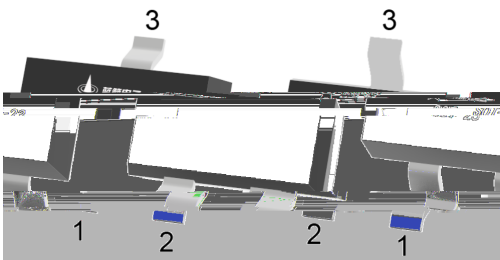

/ Marking

|  |  |
|--|--|
|  |  |
|--|--|


/ Absolute Maximum Ratings(Ta=25 )

|  |  |   |   |
|--|--|---|---|
|  |  |   |   |
|  |  |   |   |
|  |  | ~ |   |
|  |  | ~ |   |
|  |  |   |   |
|  |  | ~ | ℃ |
|  |  |   | ℃ |
|  |  | ~ | ℃ |



/ Electrical Characteristics(Ta=25 )

|  |        |       |  |  |  |  |
|--|--------|-------|--|--|--|--|
|  |        |       |  |  |  |  |
|  |        |       |  |  |  |  |
|  |        |       |  |  |  |  |
|  |        |       |  |  |  |  |
|  | △<br>△ | ~   ℃ |  |  |  |  |
|  | △<br>△ | △     |  |  |  |  |
|  |        | △     |  |  |  |  |
|  |        |       |  |  |  |  |
|  | △   △  | ~   ℃ |  |  |  |  |
|  |        |       |  |  |  |  |
|  |        |       |  |  |  |  |
|  |        |       |  |  |  |  |

/ Electrical Characteristic Curve

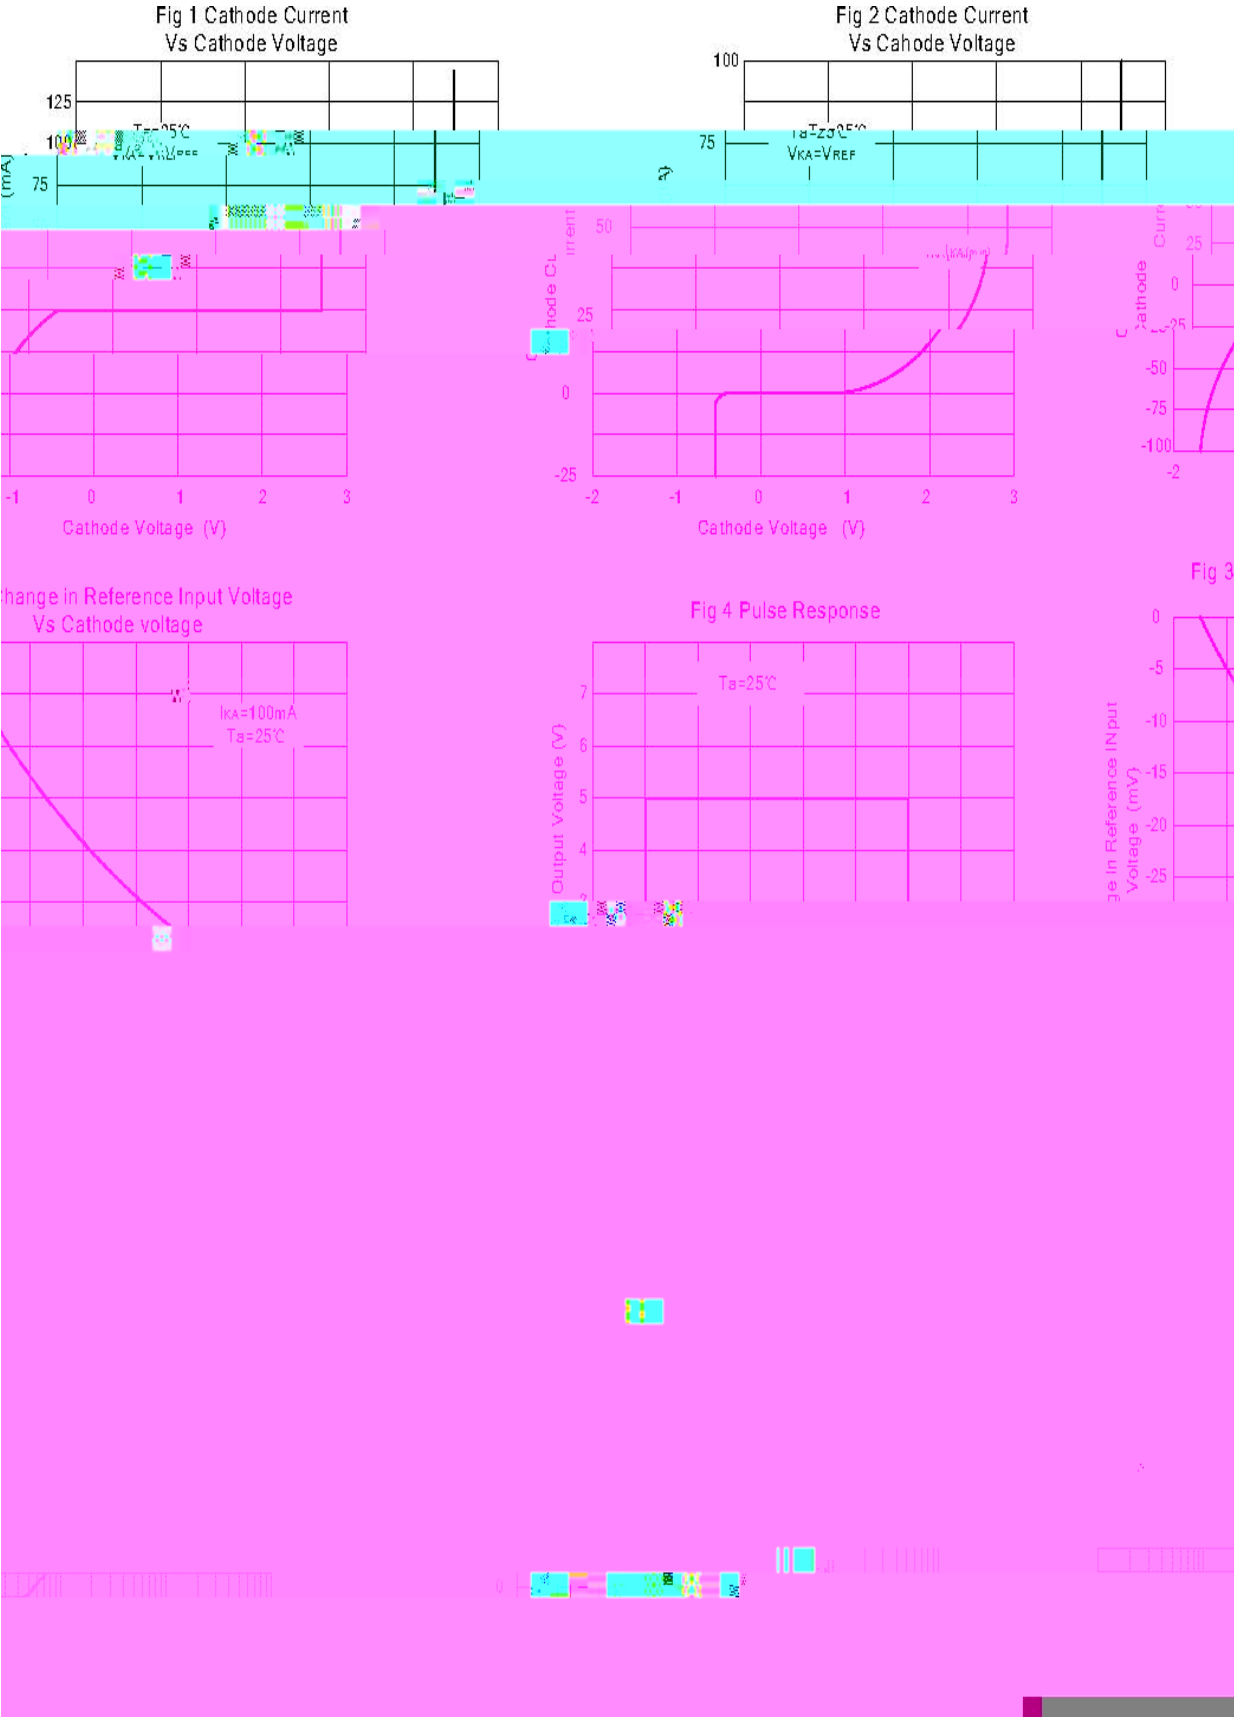


& Test circuits&Typical Application

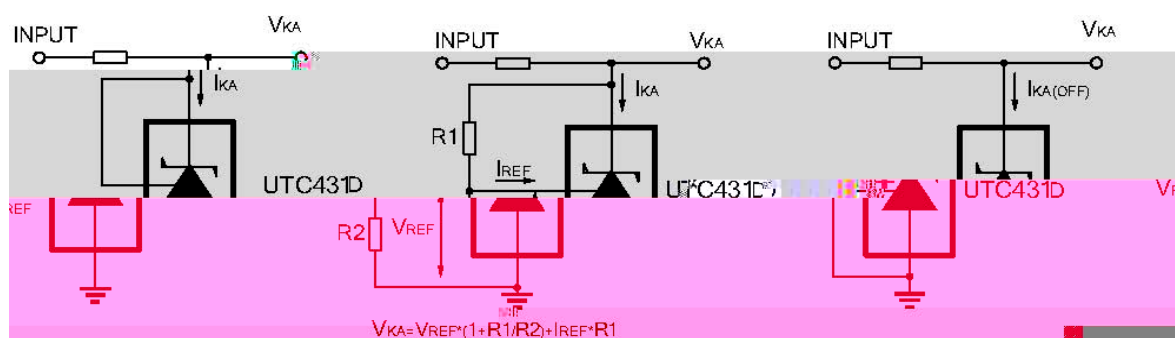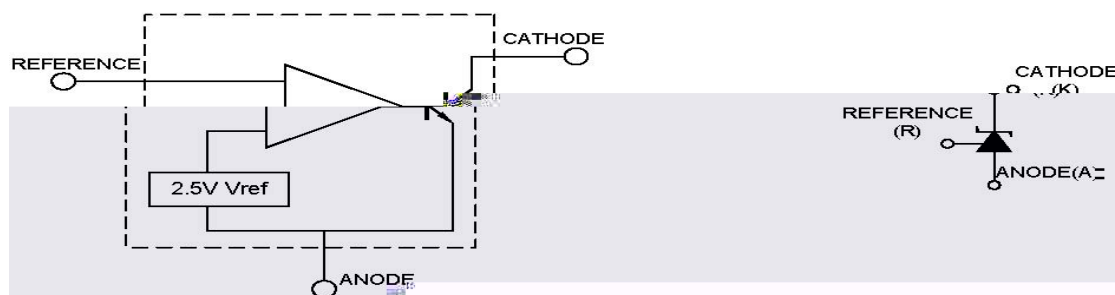


**BRTL431MQ**

/ Marking Instructions

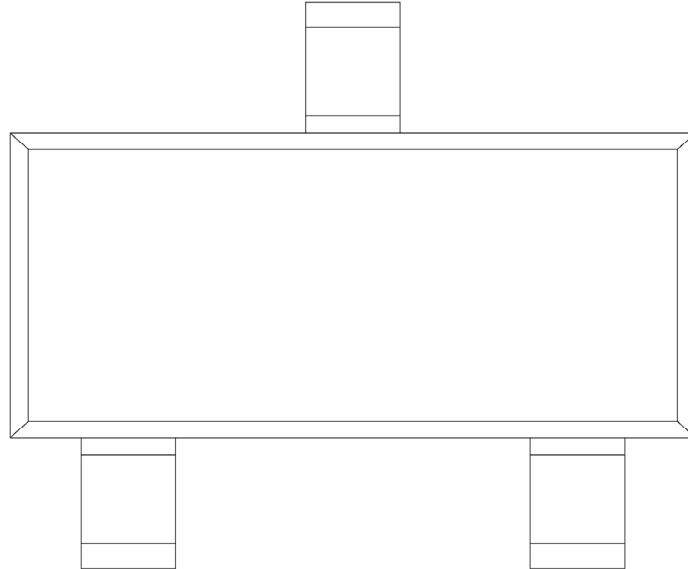

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

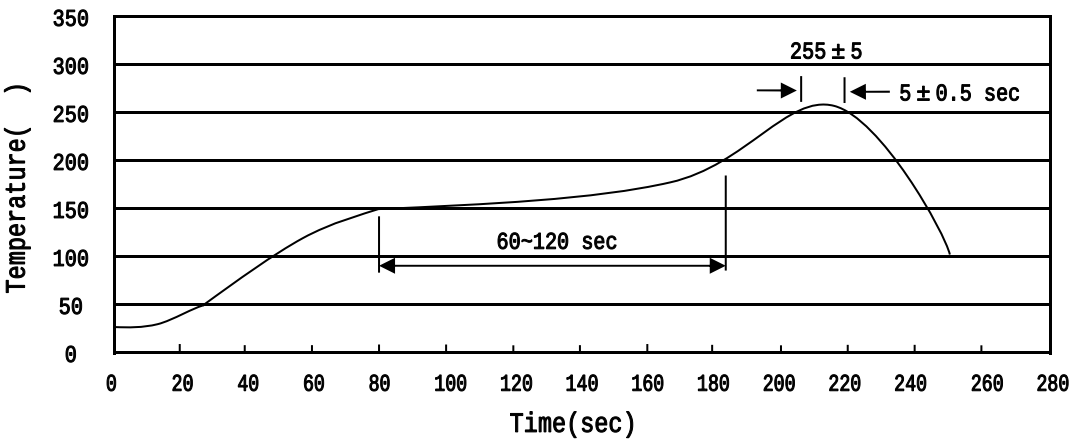

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

|  |  |  |  |  |  |   |  |  |
|--|--|--|--|--|--|---|--|--|
|  |  |  |  |  |  |   |  |  |
|  |  |  |  |  |  |   |  |  |
|  |  |  |  |  |  | " |  |  |

/ Notices