


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit

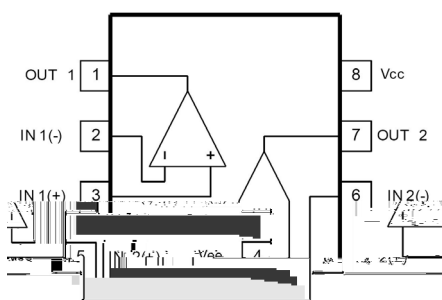

/ Pinning



/ Marking


/ Absolute Maximum Ratings(Ta=25)

		±	


/ Electrical Characteristics(Ta=25)

		∞				
		Ω				
		Ω				
		Ω				
		Ω				


/ Functional Block Diagram

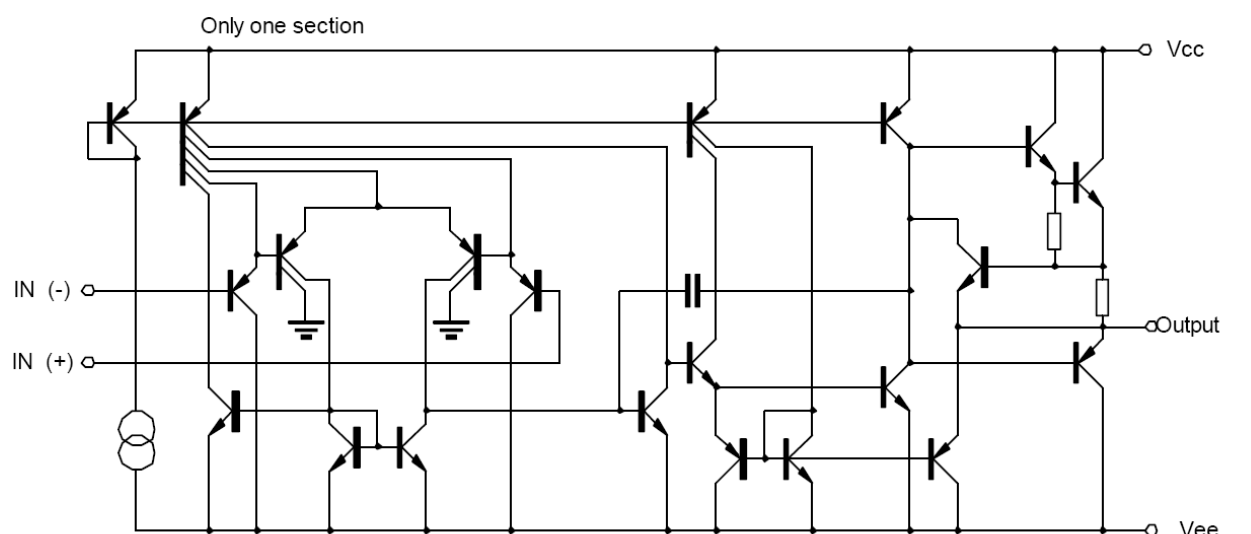


/ Electrical Characteristic Curve

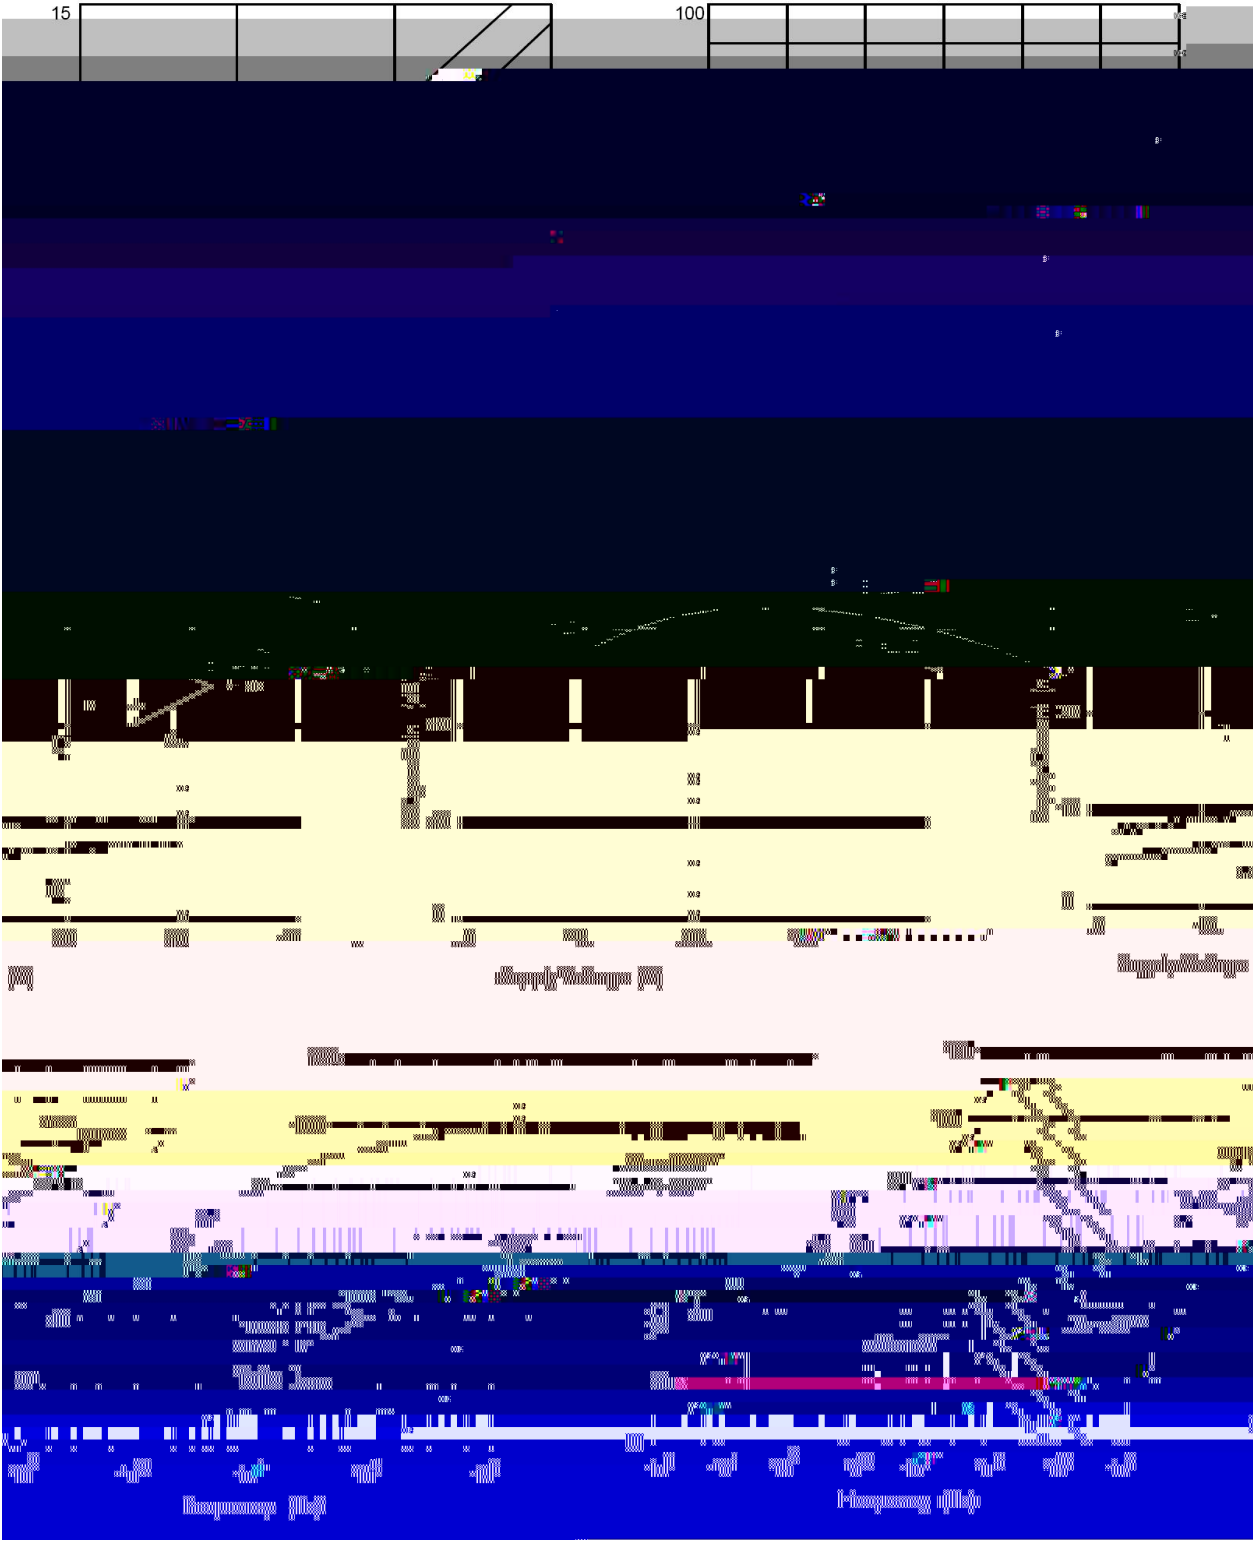


/ Electrical Characteristic Curve

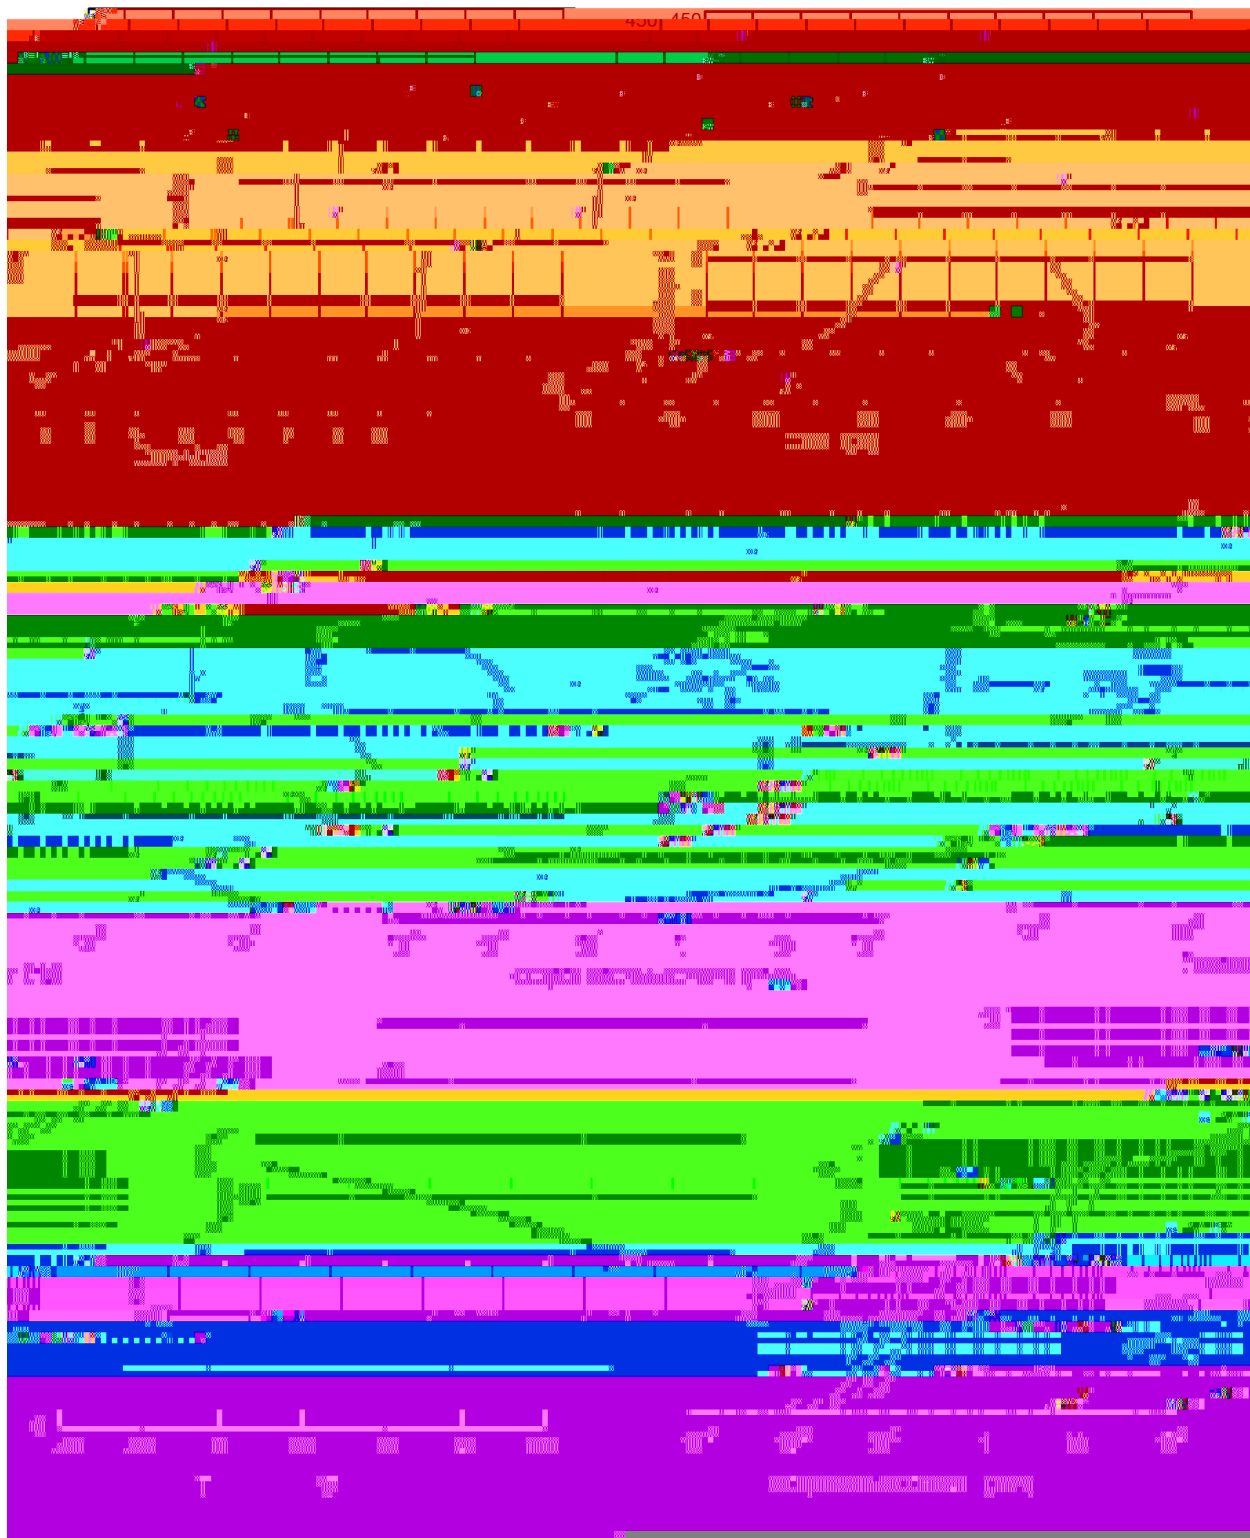


/ Package Dimensions

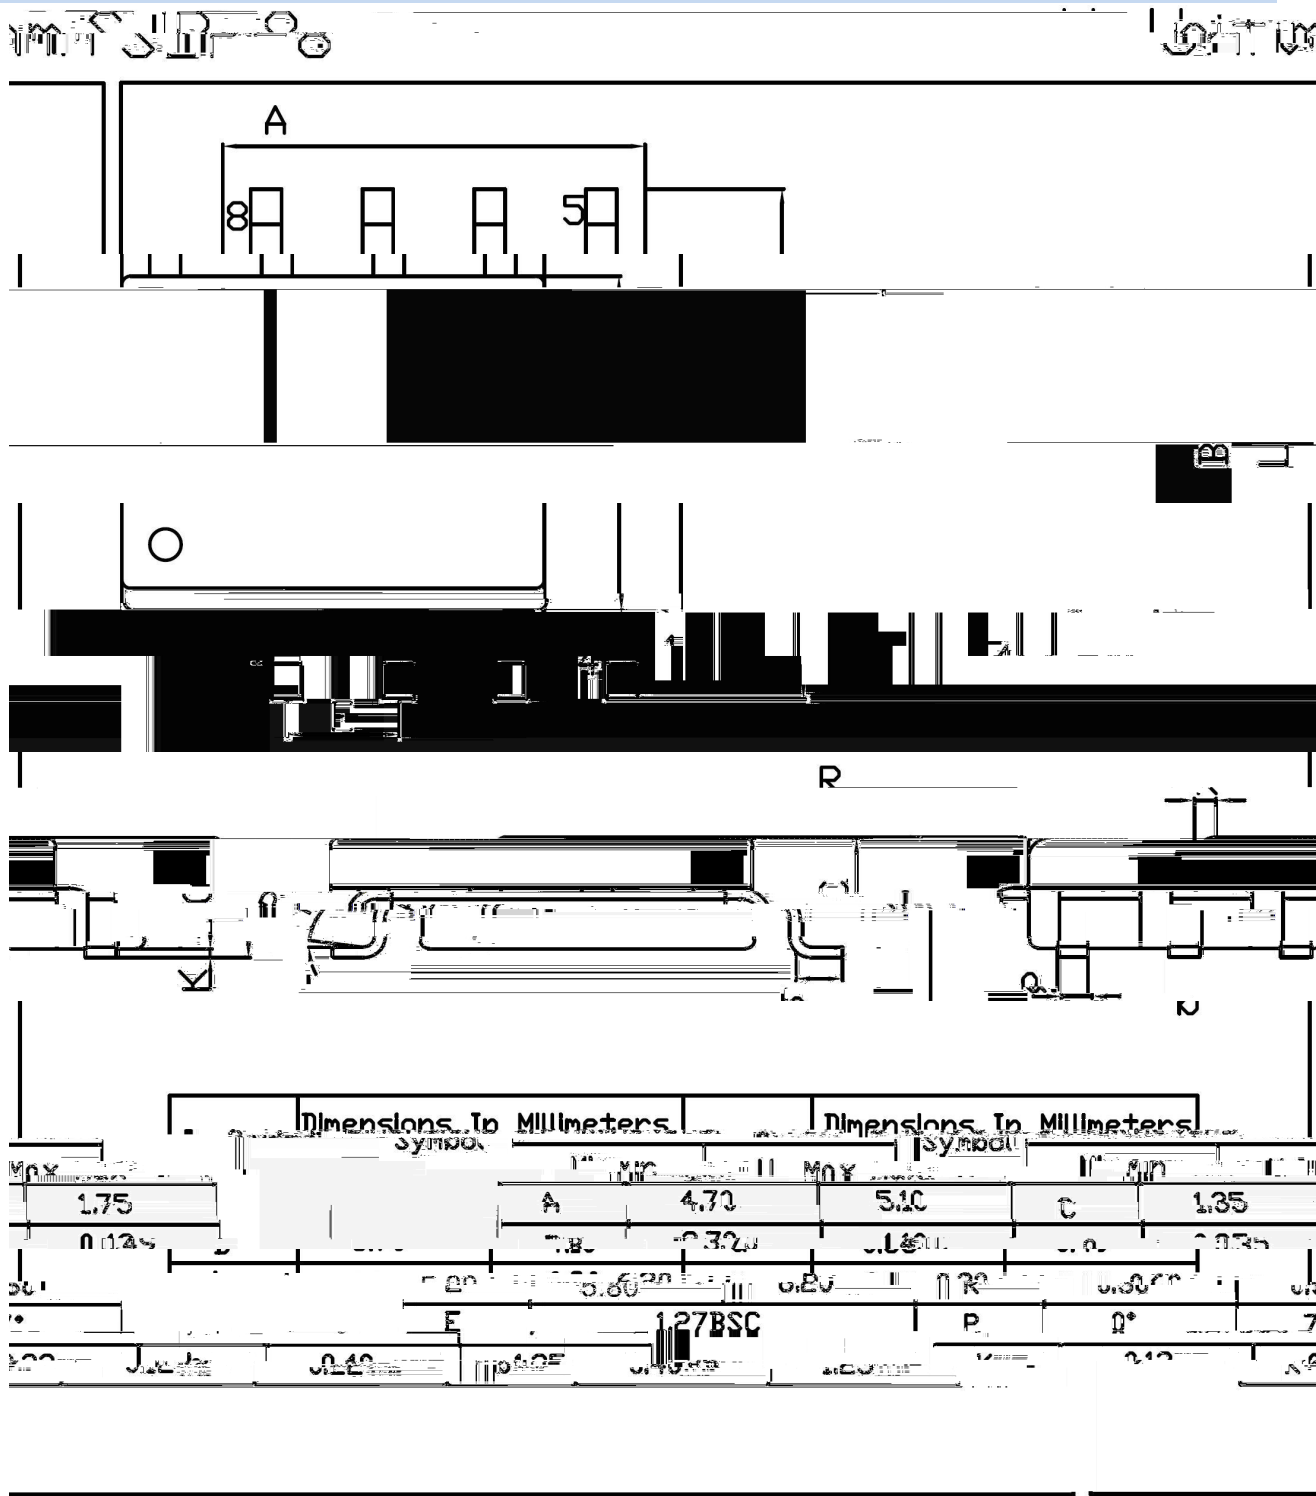

/ Marking Instructions

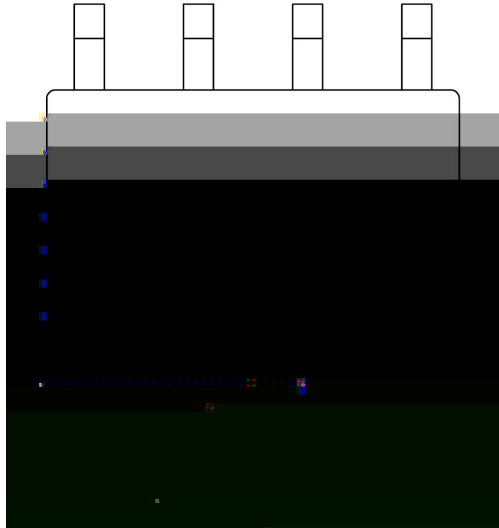

() /

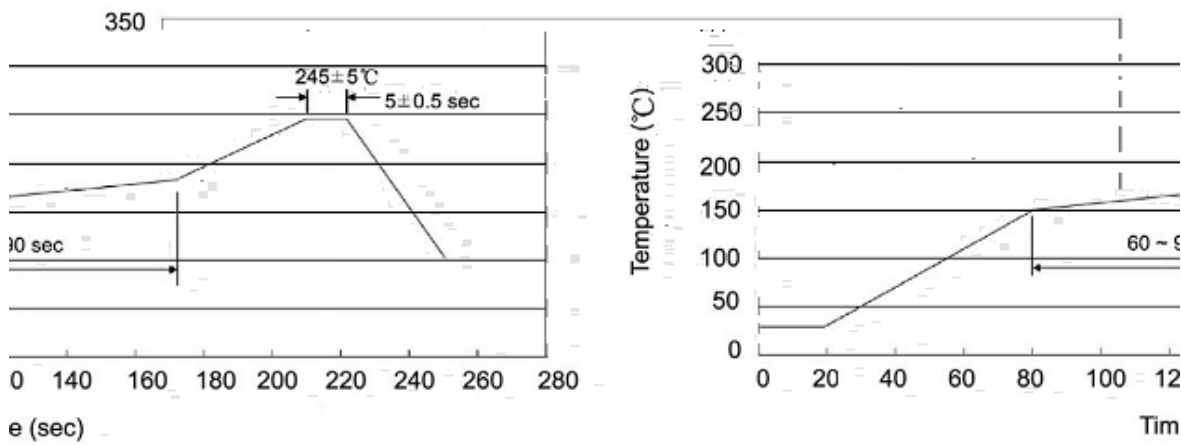

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices