


Silicon PNP transistor in a SOT-323 Plastic Package.

Complementary pair with S8050W.


Power amplifier applications.



PIN1 Emitter PIN 2 Base PIN 3 Collector


h_{FE} Classifications	B	C	D
Symbol			
h_{FE} Range	85 160	120 200	160 300
Marking	HY4B	HY4C	HY4D


Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

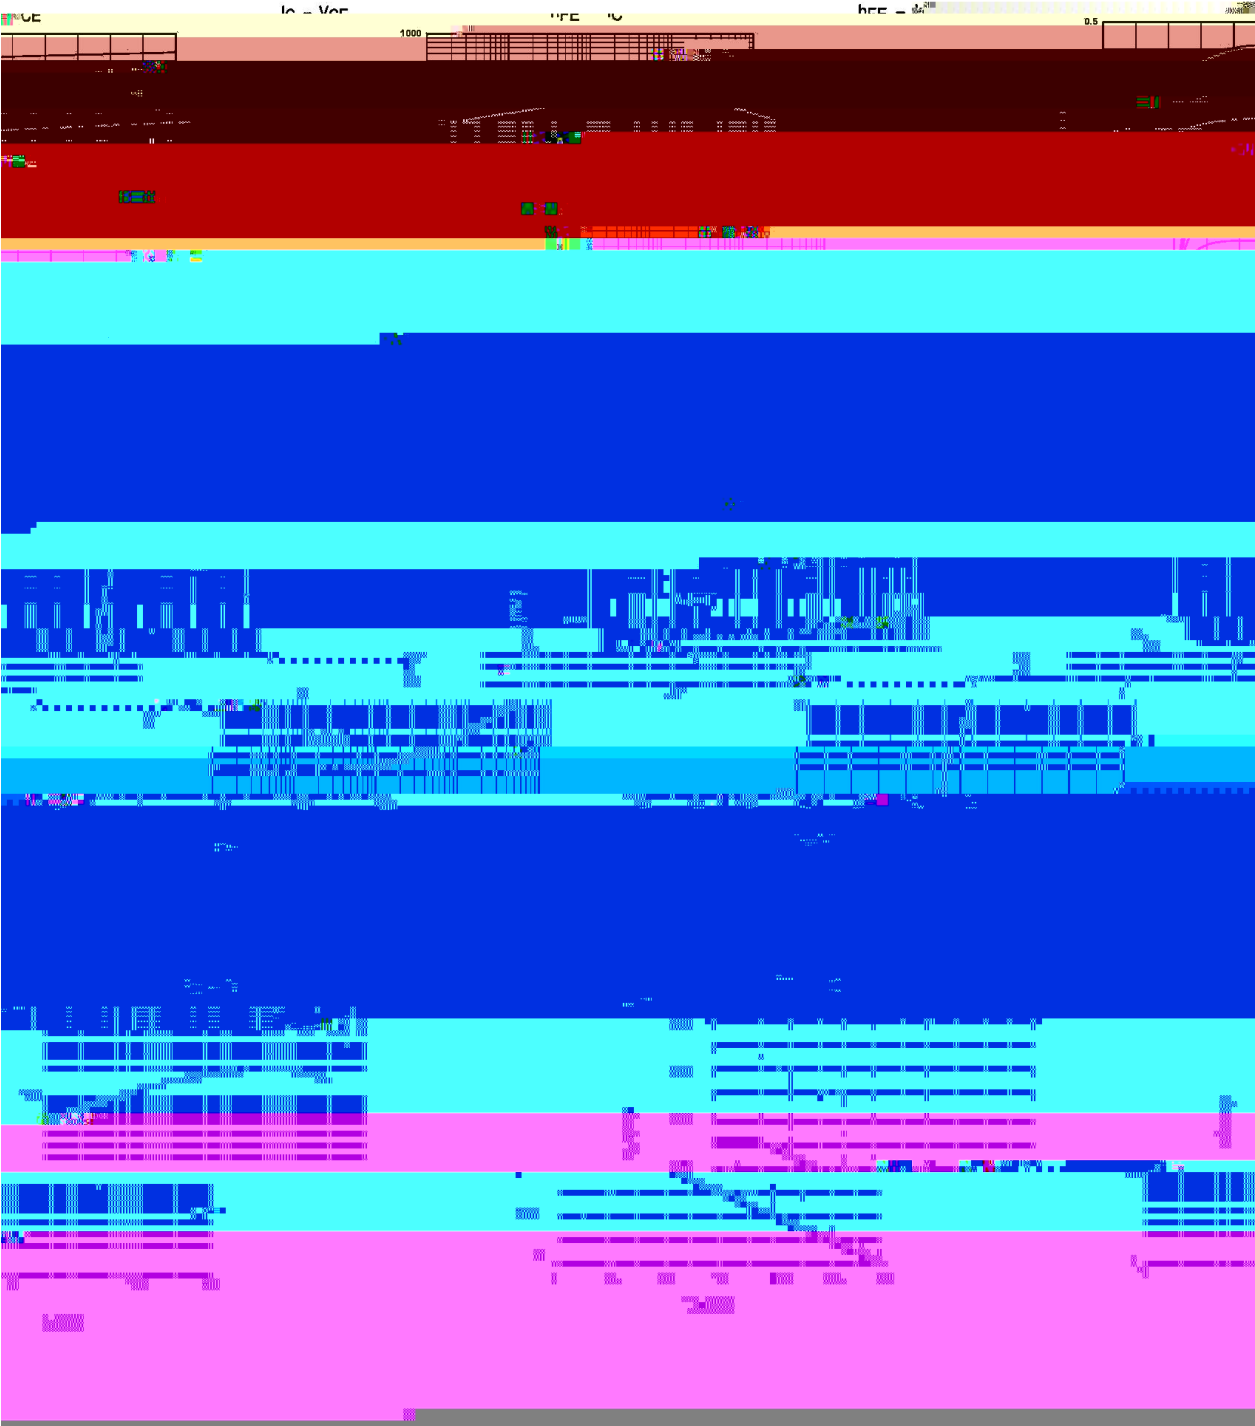

SOT-323

单位: mm

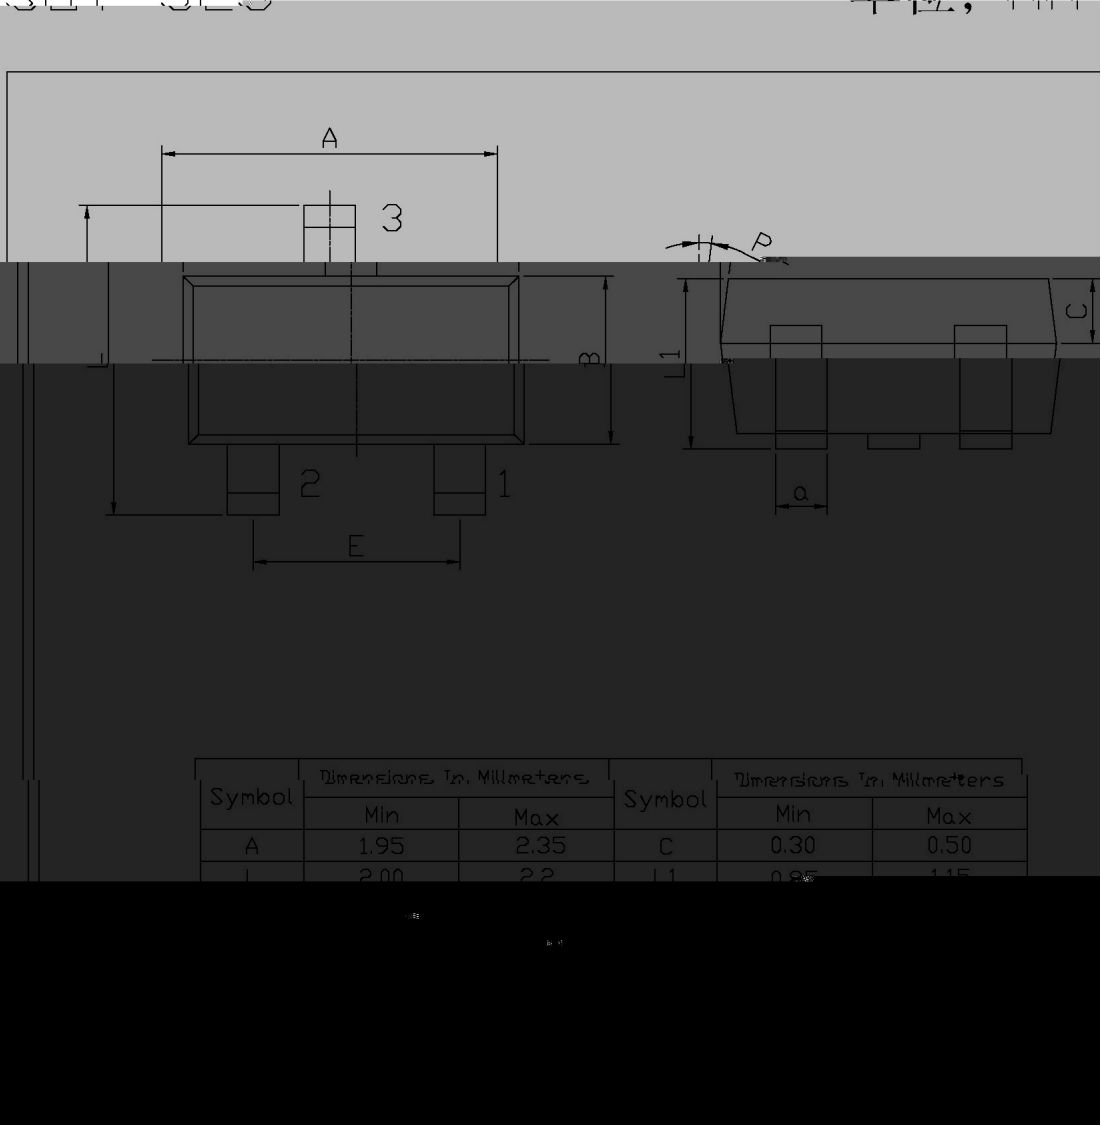

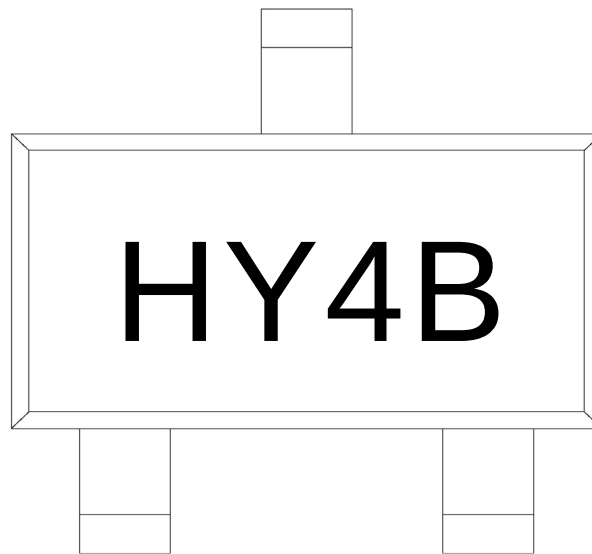

H

Y4

B h_{FE}


Note:

H: Company Code.

Y4: Product Type.

B h_{FE} Classifications Symbol

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulq j+Se0luhh,

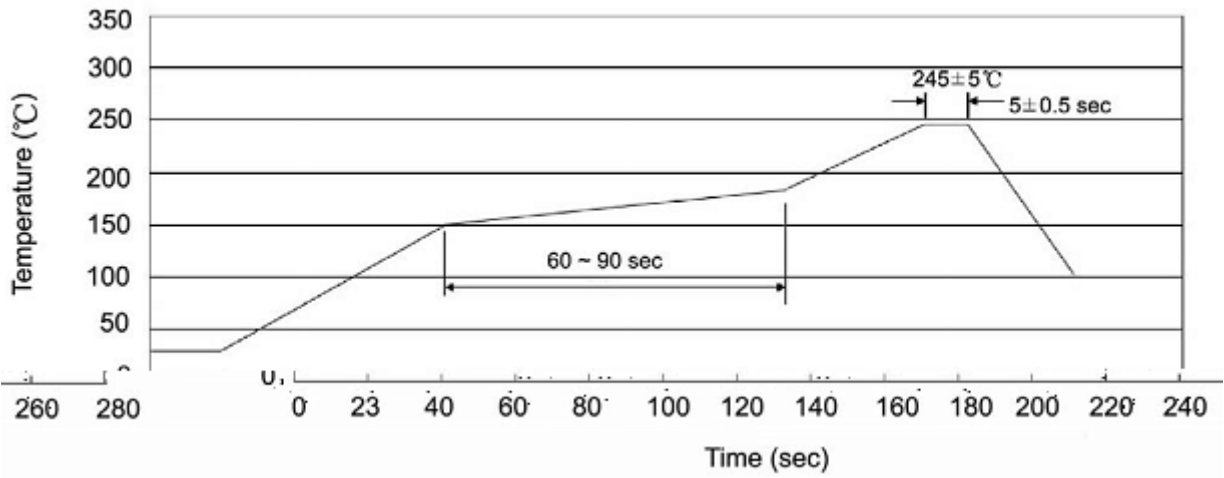

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱