


/ Descriptions

R-6

/ Features**/ Applications**

DC-DC

OR-ing

/ Equivalent Circuit**/ Pinning****/ h_{FE} Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25)

			℃
		~	℃
			℃

/ Electrical Characteristics(Ta=25)

		℃				
	()	℃				
		℃				
		℃				
		℃				
	()	℃				
		℃				


/ Marking Instructions



30T45

30T45

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

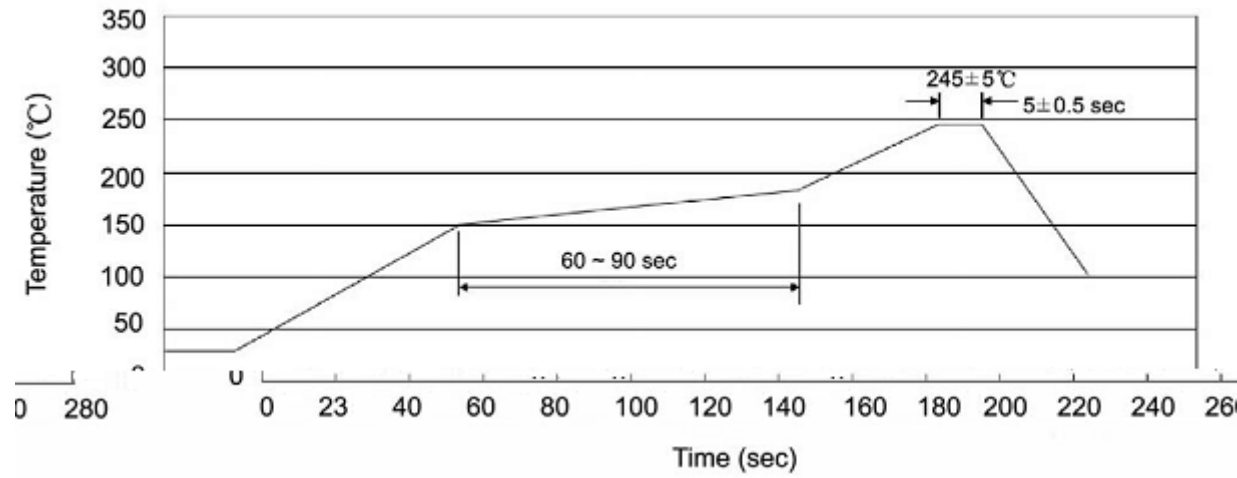

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量			包装尺寸	
	Units/Bag 只/袋	Units/Outer Box 只/箱	总重 千克	Inner Box 盒	Outer Box 箱
	250	6,000	14	293×73×40	330×330×270

封装形式	包装数量			包装尺寸			
	Units/Tape 只/纸带	Units/Outer Box 只/箱	总重 千克	Component Space 带宽	Tape Space 编带长	Inner Box 盒	Outer Box 箱
R-6	500	5,000	12	9.5	52	360×360×50	385×257×392

/ Notices