

WR0553

0 WLS475W

$R1 \equiv 8\text{ k}\Omega$
 $R2 \equiv 0.12\text{ k}\Omega$



1 6

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		Ω				μ
						μ
						μ
						μ


/ Electrical Characteristic Curve

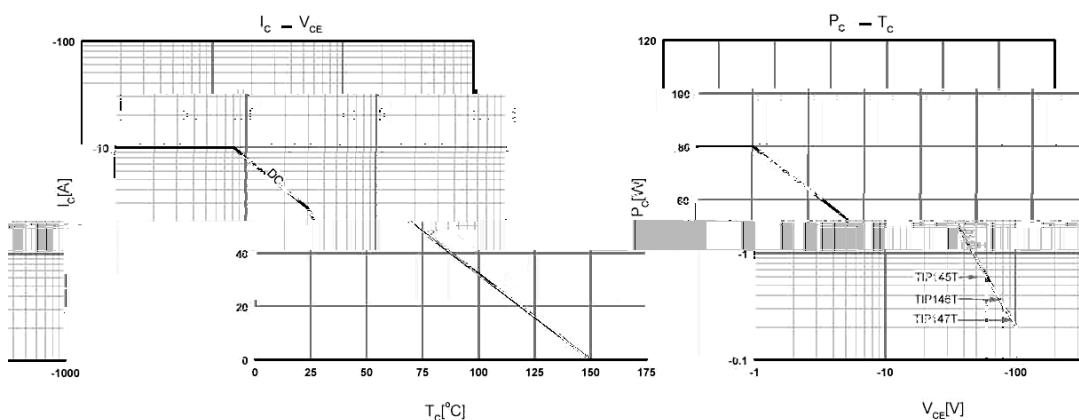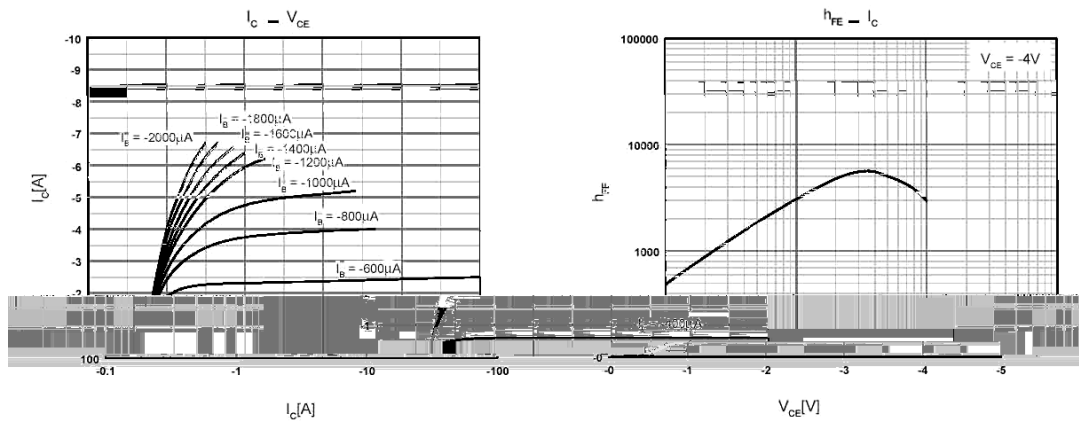

I Package Dimensions


单位: mm

T0-220

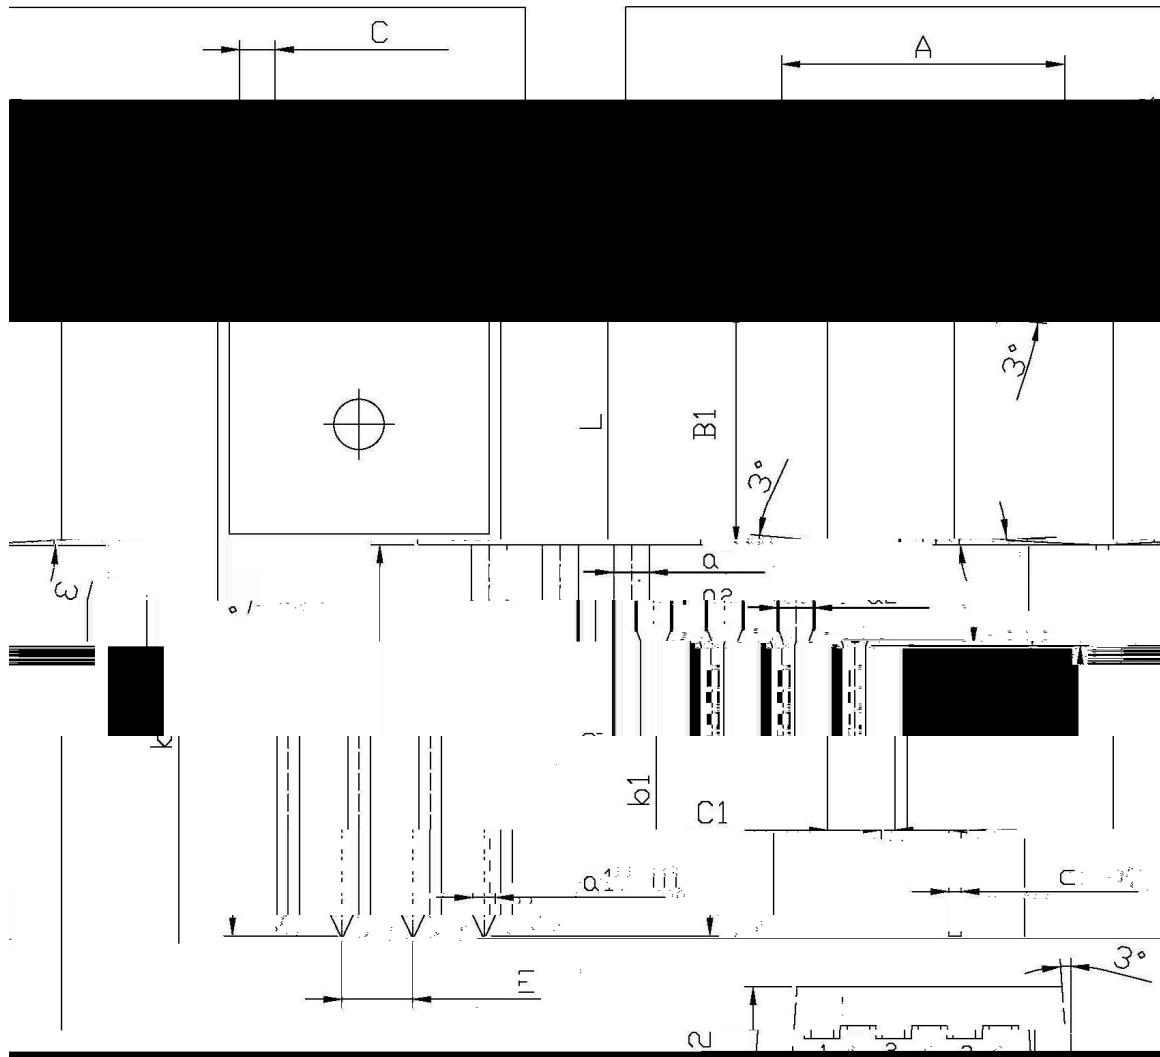

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
15.7	16.1	B1	9.0	9.4	
b	12.6	13.6	C1	2.2	2.6
b1	0.6	0.8	a	0.7	0.9
a	1.22	1.32	C	0.4	0.6
E	2.34	2.74	C2	4.3	4.7
0.2	1.25	1.45			


/ Marking Instructions

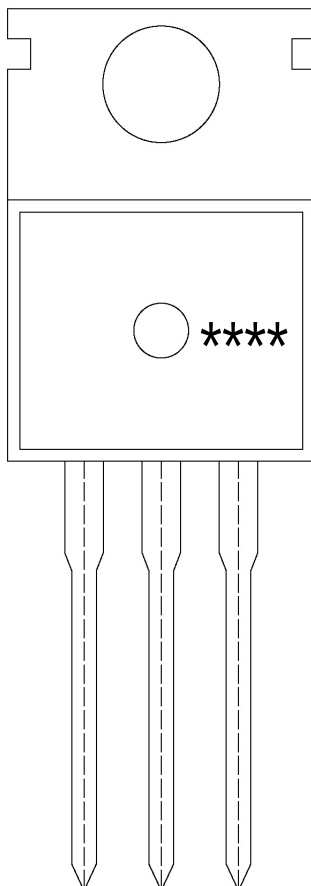

EU

WLS47:W

() / Temperature Profile for Dip Soldering(Pb-Free)

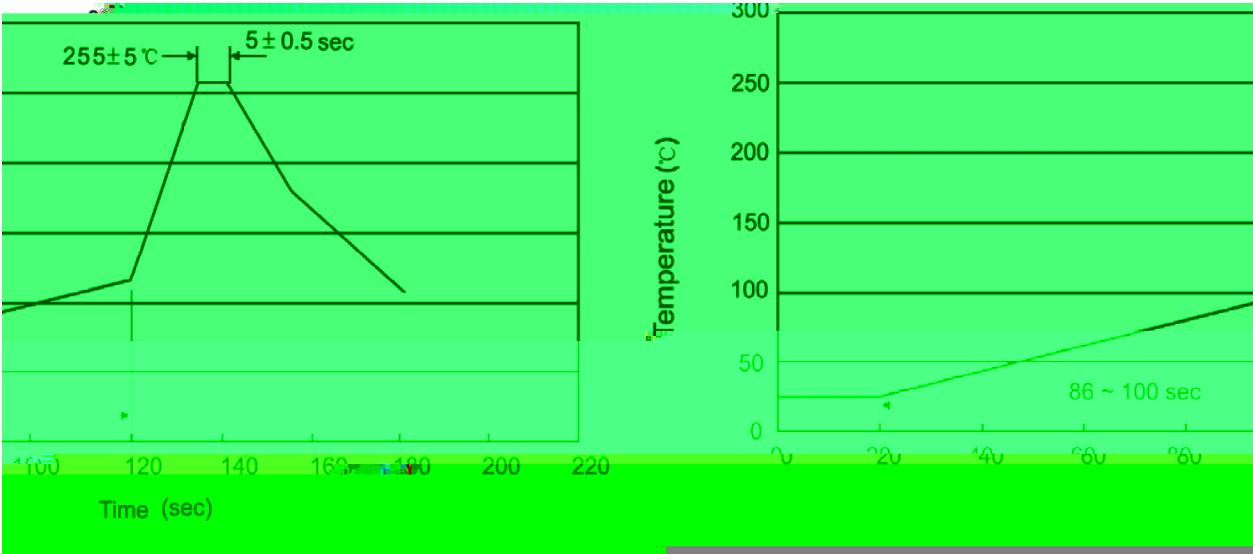

$\frac{3}{8}$
2 $\frac{3}{8}$ 2
2

$\frac{3}{8}$
2 $\frac{3}{8}$ 2